




QD 4 SQUARE DRIVE
HYDRAULIC TORQUE WRENCH MANUAL
REVISION 6
12/08

HYDRALINKS
CONVERTIBLE BOLTING TOOLS

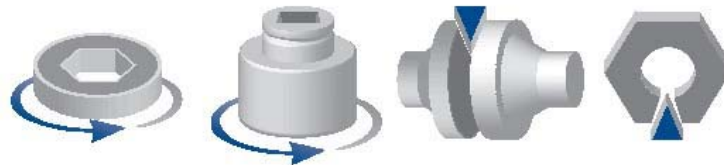

BOLTTECH-MANNINGS INC.
200 RIVERSIDE DRIVE
WEST NEWTON, PA 15089 USA
PHONE: 724-872-4873
FAX: 724-872-8827
www.bolttech.com

OPERATIONS / MAINTENANCE MANUAL MODEL QD4 SQUARE DRIVE

Revision 6

GENERAL

All Bolttech-Mannings Hydraulic Wrenches are supplied completely assembled, ready for use. A hydraulic Power Pack is required to provide the speed and pressure that makes your Wrench System efficient and accurate.

CONNECTING THE SYSTEM




The wrench head and power pack are connected by a 10,000 psi hose assembly which consists of two hoses. One hose has a female connector on each end while the other has male connectors. Connect the twin line hose to the wrench head and pump. Insure the connectors are fully engaged and screwed snugly and completely together.

DRIVE DIRECTION CHANGE FOR SQUARE DRIVE TOOLS ONLY (to change from loosening to tightening)

LOOSEN



TIGHTEN

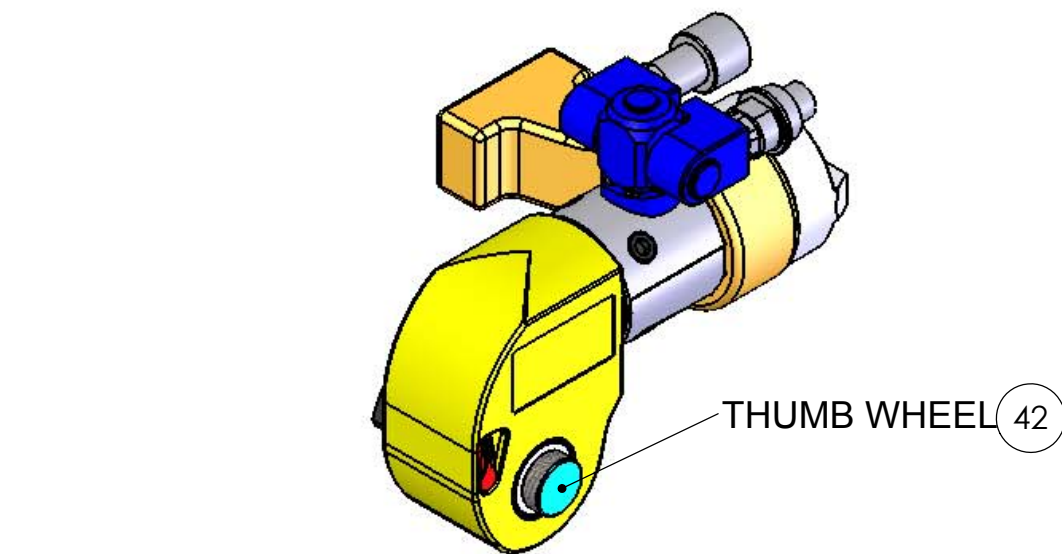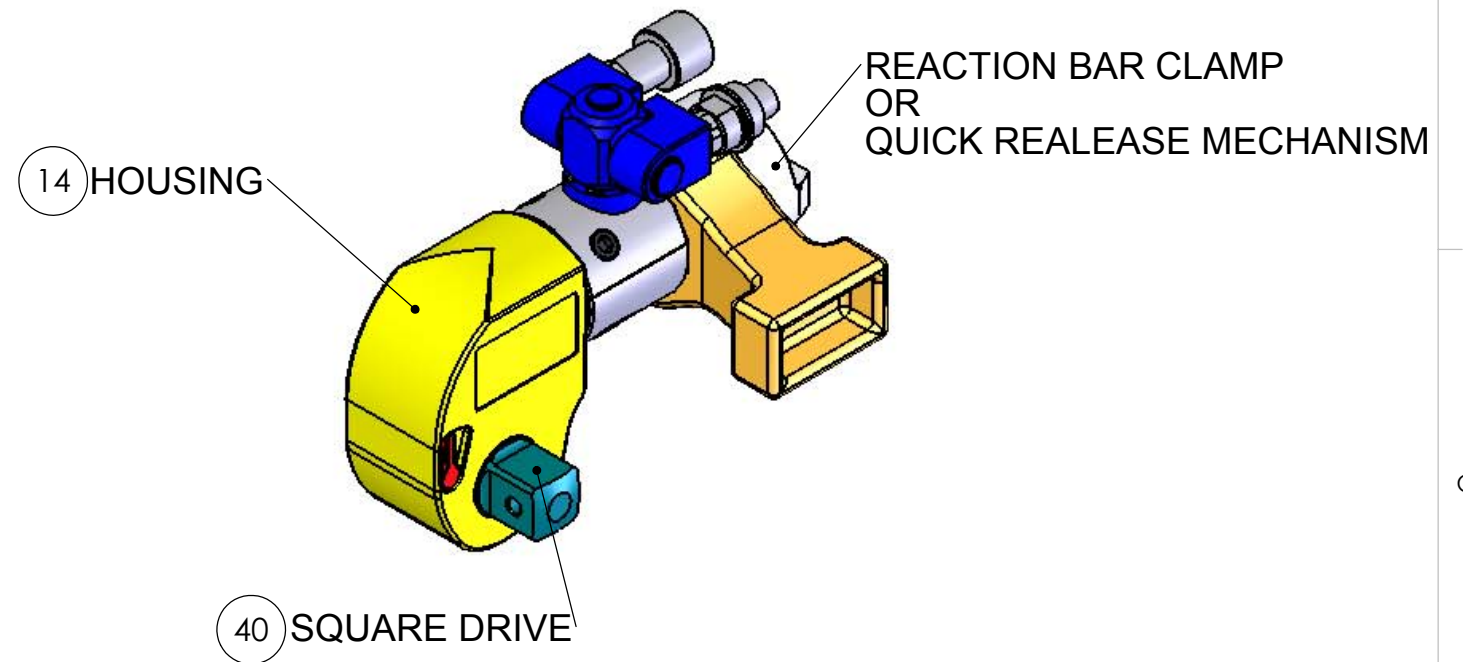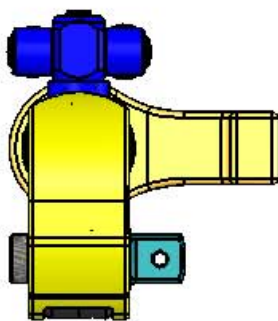

Remove the hand wheel in the drive cap which is located on the opposite side of the drive extension and pull the drive out of the tool housing. Place the drive in the desired direction, re-insert the drive cap and secure the hand wheel.

NOTE: The square drives are splined. As you push the spline part of the drive into the tool, align the ratchet and push, while slowly rotating, the square drive into position.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED	
MATERIAL	ENG APPR.	MFG APPR.	CUSTOMER:
HEAT TREAT	Q.A.		TITLE:
FINISH	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		SIZE B
			DWG. NO.
	SCALE: 1:4	WEIGHT:	SHEET 2 OF 18

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

REACTION ARM

All Bolttech-Mannings Hydraulic Wrenches are equipped with a universal reaction arm. These reaction arms are employed to absorb and counteract reaction forces created as the units operate. The reaction arm should always extend in the same direction of the square drive; however, adjustments may be made to suit your particular application.

To adjust the reaction arm, unscrew the reaction arm retaining clamp and slide the reaction arm off of the housing. Next, rotate the reaction arm to the desired orientation and slide it back onto the housing and secure the retaining clamp.

SETTING TORQUE

With the system fully connected and the proper power supply available, find the desired torque conversion chart supplied for your particular tool model. Read across to the corresponding pressure. This pressure is to be set on the pump. To do so, turn on the pump, press down on the "advance" remote control button and hold, pressure will build up on the gauge. To adjust pressure, loosen the locking ring on the pressure regulator valve and turn the thumbscrew clockwise to increase pressure, counterclockwise to decrease pressure.

NOTE: When decreasing pressure, it is necessary to turn the thumb-screw to a pressure setting **BELOW** what is desired and gradually increase the pressure to the desired level.

Once the desired pressure is stabilized, re tighten the locking ring.

PRIOR TO BEGINNING TO TORQUE - PRESS DOWN ON REMOTE CONTROL BUTTON AND CONFIRM THE CORRECT PRESSURE HAS BEEN SET.

APPLYING THE TORQUE WRENCH

Place the proper size impact socket on the square drive and secure properly with a locking ring and pin.

Place the tool and the socket on the nut making sure that the socket has fully engaged the nut and that the square drive is fully into the socket.

Make sure the reaction arm is firmly abutted against a stationary object (i.e. an adjacent nut, flange, equipment housing, etc.)

Make sure that the hoses are not placed between the reaction members.

Apply momentary pressure to the system to ensure proper tool placement.

SAFETY PRECAUTIONS

Your Bolttech-Mannings torque wrench is a power tool, and as with any power tool, certain safety precautions should be observed to avoid accidents or personal injury. The following tips will assist you:

- . Do not kink the hydraulic hoses, and be sure they're clear of any possible reaction surface during operation.

- . Do not use the hoses or any hydraulic connection as a "handle".

- . All in-line links are supplied with a boot. The boot is to be used as a reaction surface. Always use a boot with a in-line link, failure to do so will cause permanent damage to the cylinder and void the manufacturer's warranty.


- . All square drive links are supplied with a reaction bar. The reaction bar is to be used as a reaction surface. Always use the reaction bar with a square drive link, failure to do so will cause permanent damage to the cylinder and void the manufacturer's warranty.

- . Be sure the reaction boot retaining clamp is fully engaged. The reaction bar or boot should be located on a solid, secure reaction point. For added safety, remain clear of the rear of the reaction bar or boot during operation. Also, when initially applying the tool, pressurize the system momentarily; if the tool tends to "ride up" or "creep", stop and re-adjust the reaction bar or boot to a more solid and secure position.

- . Always use top quality impact sockets in good condition, which are the correct size and fully engage the nut. Hidden flaws, however, remain a possibility which could cause breakage, so stay clear of sockets during operation.

- . In most cases, the tool will allow "hands-free" operation. If the tool must be held or steadied during operation, avoid handling the area around the reaction bar or boot.

- . Electric pumps should never be used in any atmosphere which could be considered potentially volatile. If there is any doubt, use an air pump.
At Bolttech, safety is one of our primary concerns. By following these few, simple precautions, you'll be sure to obtain the most beneficial use of your Bolttech wrench system in the safest manner possible.

SOFTWARE: SOLID WORKS	DATE	NAME	 We Own the Future of Bolting Technology						
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED		CUSTOMER:					
MATERIAL	ENG APPR.	MFG APPR.	TITLE:						
HEAT TREAT	Q.A.	<table border="1"> <tr> <td>SIZE</td> <td>DWG. NO.</td> <td>REV</td> </tr> <tr> <td>B</td> <td></td> <td></td> </tr> </table>		SIZE	DWG. NO.	REV	B		
SIZE	DWG. NO.			REV					
B									
FINISH	<p>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.</p>		SCALE: 1:2						
WEIGHT:		SHEET 3 OF 18							

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

OPERATING THE WRENCH SYSTEM

By depressing the remote control button, the rear of the tool will be pushed back until its reaction arm contacts its reaction member. Continue to hold down the button as the socket turns until you hear an audible "click" which will signify that the hydraulic cylinder inside the tool is fully extended and will not turn the nut any further. There will be a rapid buildup of pressure to the point of where the pressure was preset prior to applying the wrench.

IMPORTANT: This rapid buildup of pressure does no indicate that this pressure (torque) is being applied to the fastener. It only indicates that the cylinder is fully extended and can not turn the socket further until the tool is retracted to pick up the next tooth on the ratchet wheel.

Releasing the remote control button will retract the cylinder, the tool will automatically reset itself and the operator will hear an audible "click" indicating he can again push the remote control button and the socket will turn. Each time the cylinder is extended and retracted, it is called a cycle. Successive cycles are made until the tool "stalls" at the pre set pressure (torque).

NOTE: Always attempt one final cycle to insure the "stall" point has been reached.

Should the tool "lock on" after the final cycle, push down the remote control button to build pressure. While maintaining this pressure rotate the release mechanism and relieve the pump pressure. This will allow the tool to be easily removed.

LOOSENING PROCEDURES

First, set the pump to 10,000 psi. Change the drive and reaction arm to the loosening mode and apply the tool, assuring the reaction arm abuts squarely off a solid reaction point. Press and hold the remote control button. Pressure will build up as the socket begins to turn. Cycle the wrench until the fastener is loose enough to turn by hand.

If the socket does not turn using the above procedure, it is an indication that you will require the next larger size tool to loosen the fastener.

PREVENTIVE MAINTENANCE

Tool failure does occur. Such failure is most often in the hydraulic connectors or hoses. These items are repairable/replaceable immediately, since they are available universally. Failure of structural members of the tool are quite rare, but replacement parts are available from stock.

Special tools are required for the disassembly of the hydraulic cylinder and drive mechanism.

LUBRICATION: All moving parts should periodically be coated with a good quality molybdenum disulfide grease. Under harsh environmental conditions, cleaning and lubricating should be done more frequently.

HYDRAULIC HOSES: Hoses should be checked for cracks and leaks after each job. Hydraulic fittings can become plugged with dirt and should be flushed periodically.

QUICK-CONNECTS: Fittings should be kept clean and not allowed to be dragged along the ground or floor, as even small particles of dirt can cause internal valves to malfunction. External leakage can be eliminated by applying a fresh coat of good quality sealant to the threads and tightening securely.

SPRINGS: Springs are used for the drive pawl assembly and ratchet device. These springs should be checked twice a year and replaced, if necessary.

HYDRAULIC SEALS: If the cylinder packing should require replacement because of leaks, it is recommended that all other seals and o-rings be replaced at the same time. Seal Kits are readily available.





MACHINE PARTS: All components that are included on the tool should be inspected once a year to determine if there are any cracks, chips, or deformities. If so, immediate replacement is required.

CYLINDER BOLTS: Periodically check to see if the cylinder bolts are properly torqued. Torque cylinder bolts in a criss-cross pattern to the following values
 QD2 8 ft-lbs
 QD4 8 ft-lbs
 QD8 15 ft-lbs
 QD14 15 ft-lbs
 QD30 25 ft-lbs

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN		CUSTOMER:	
	CHECKED		TITLE:	
	ENG APPR.		SIZE	DWG. NO.
	MFG APPR.		B	REV
MATERIAL	Q.A.		SCALE: 1:2	WEIGHT:
HEAT TREAT	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		SHEET 4 OF 18	
FINISH				

QD4 COMPLETE ASSEMBLY


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

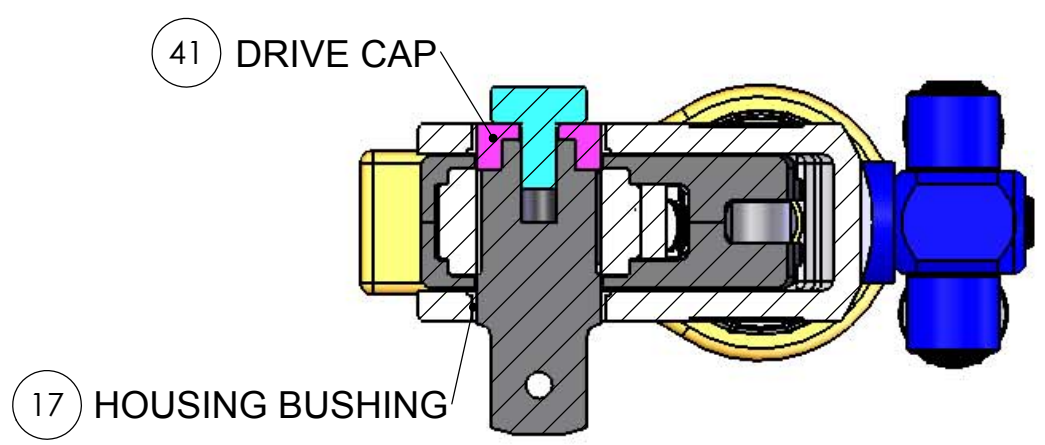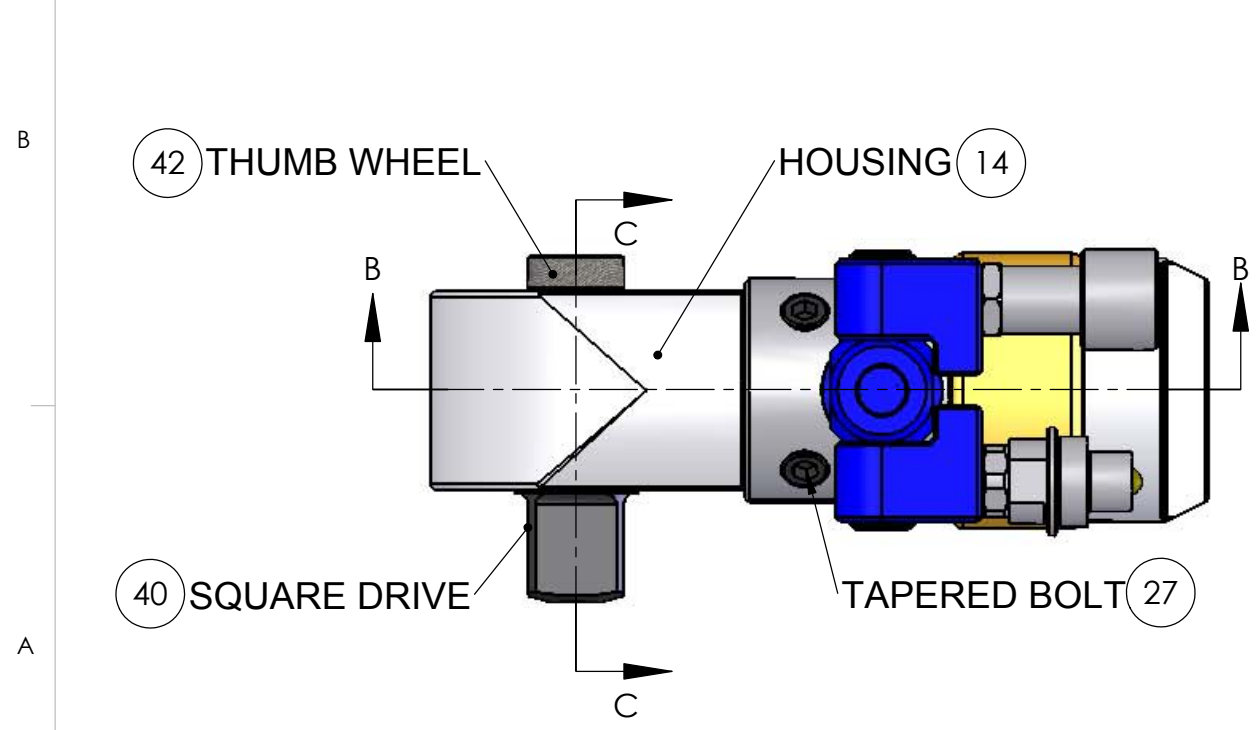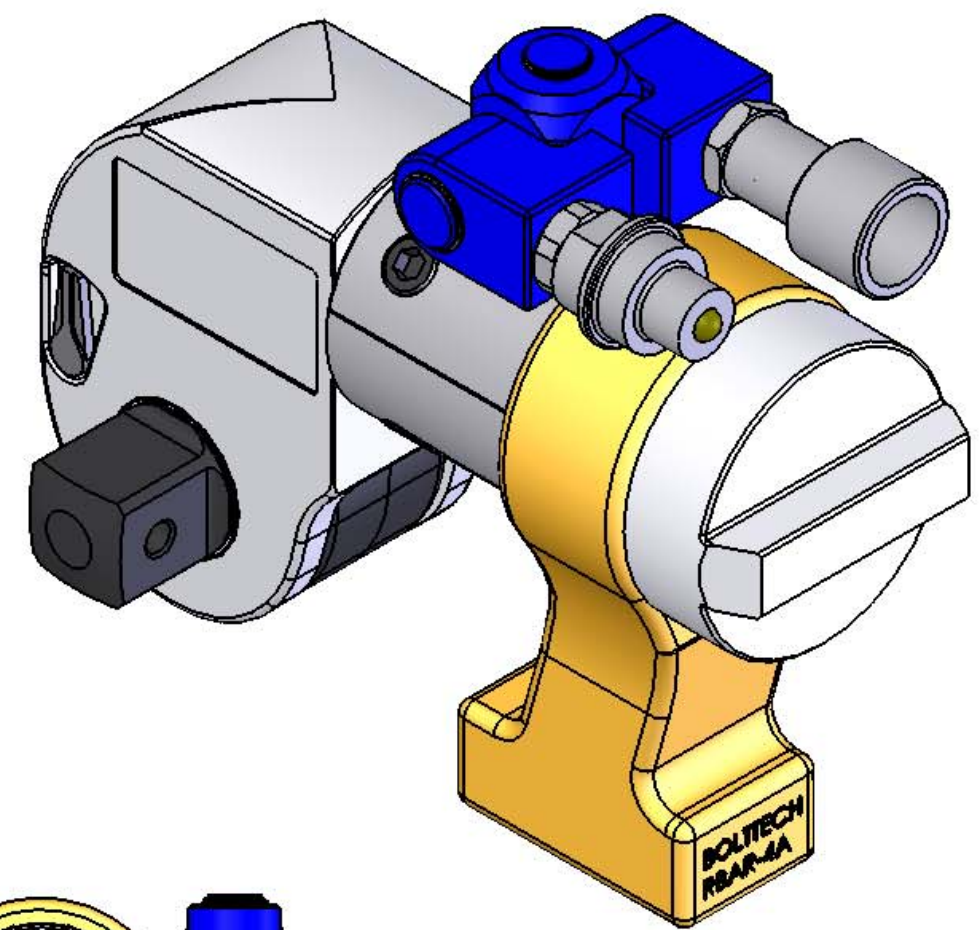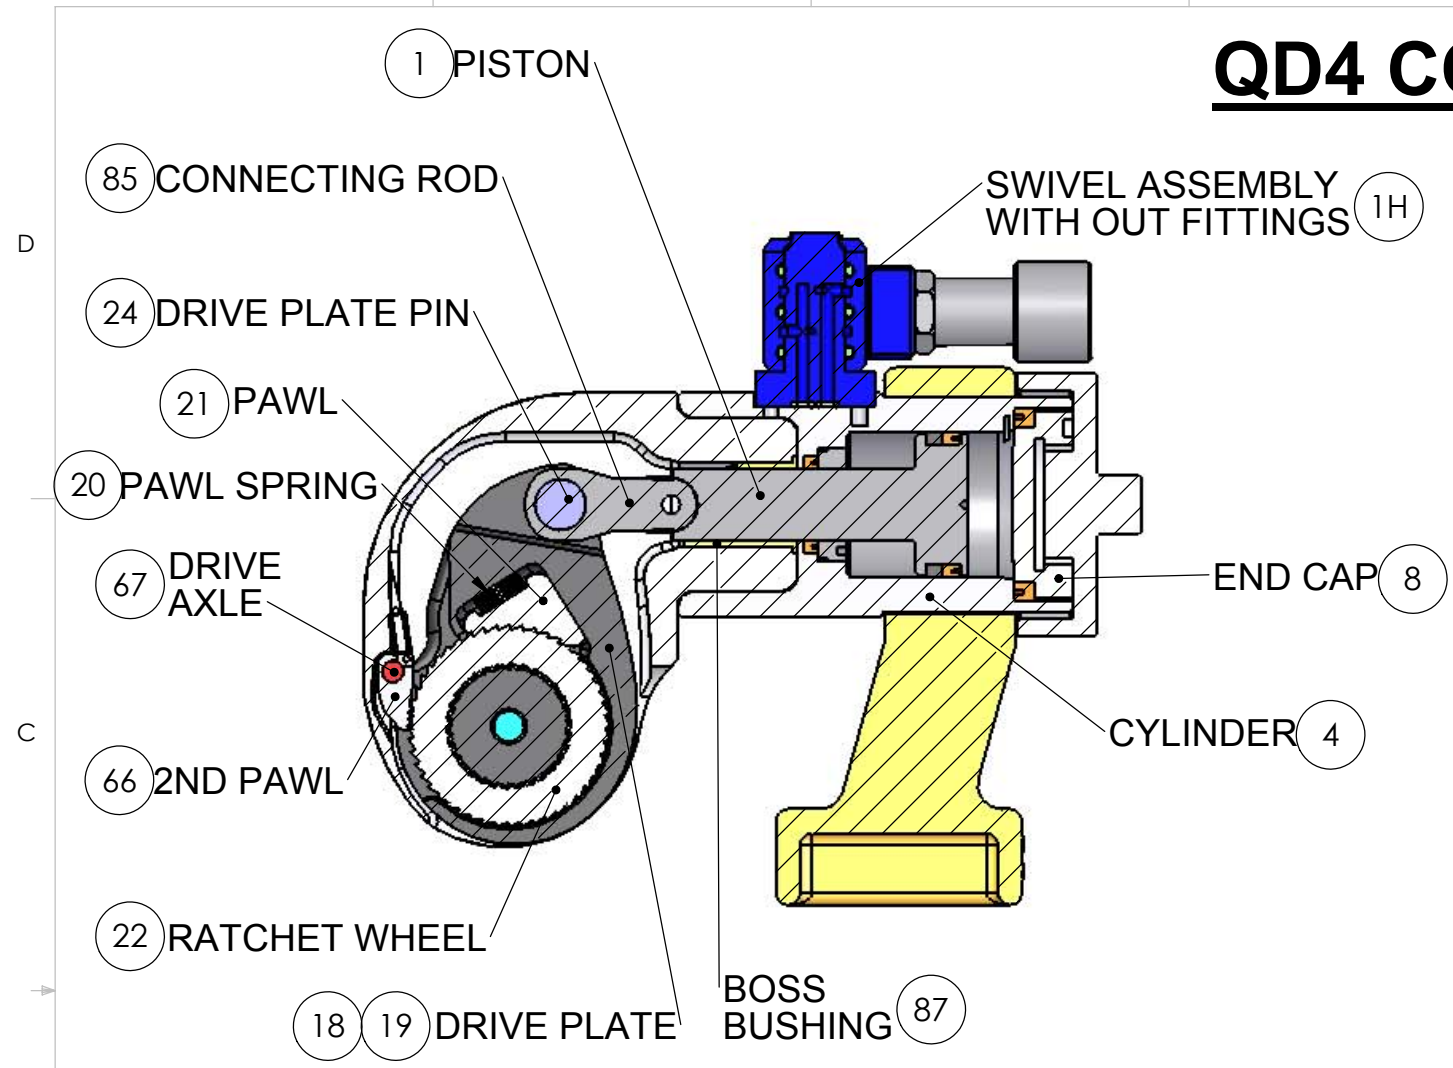

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED	
MATERIAL	ENG APPR.	MFG APPR.	TITLE:
HEAT TREAT	Q.A.		
FINISH	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		SIZE B DWG. NO. REV
SCALE: 1:2		WEIGHT:	SHEET 5 OF 18

QD4 DRIVE PLATE ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

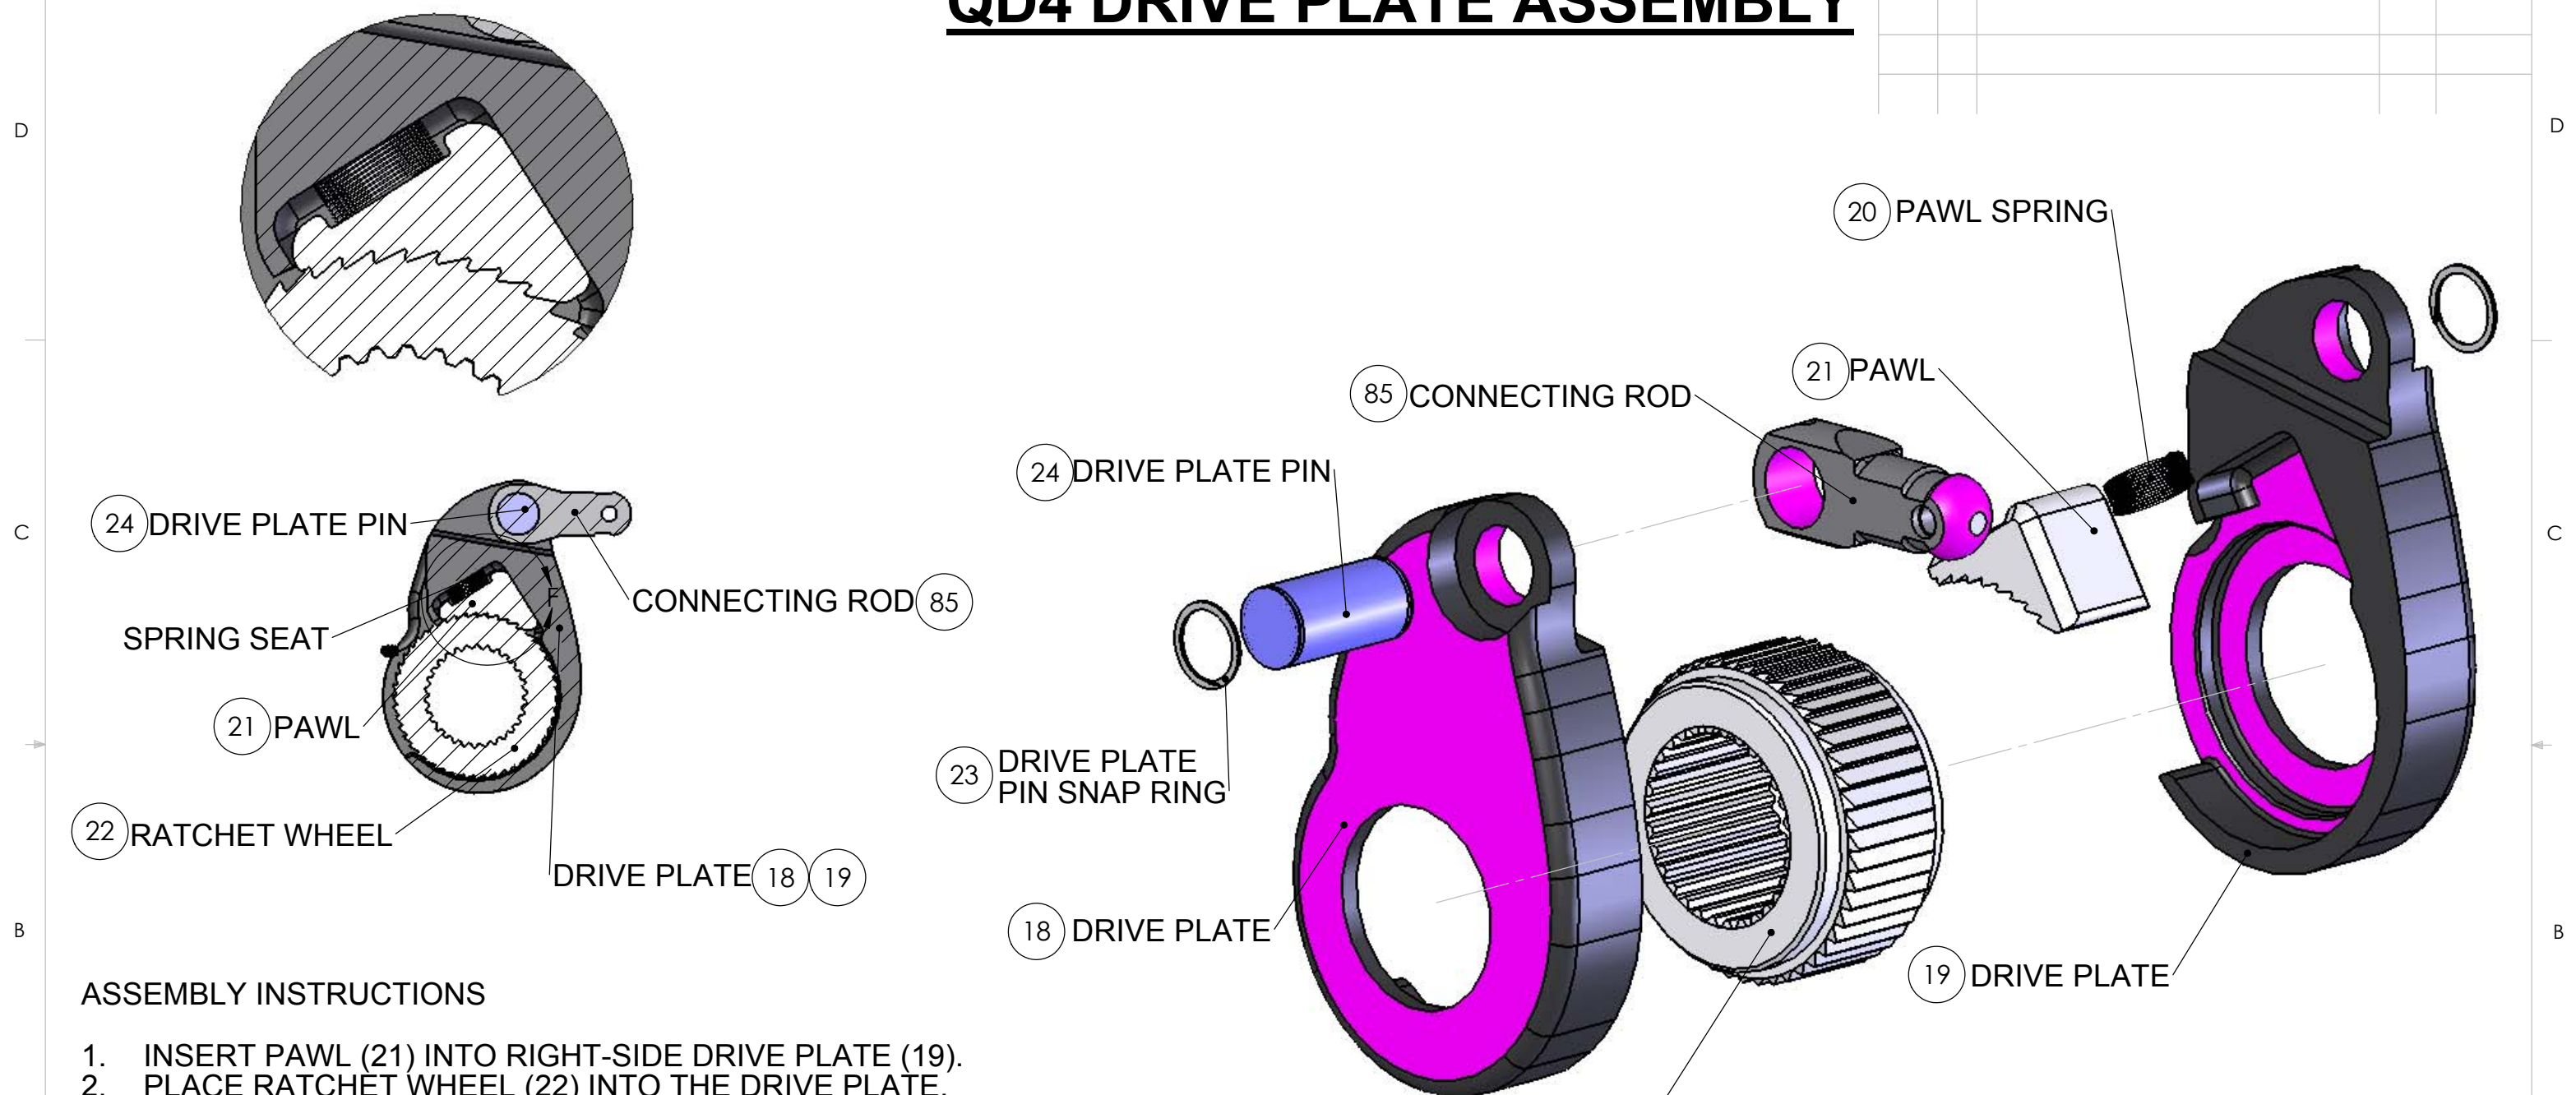

ASSEMBLY INSTRUCTIONS

1. INSERT PAWL (21) INTO RIGHT-SIDE DRIVE PLATE (19).
2. PLACE RATCHET WHEEL (22) INTO THE DRIVE PLATE.
- **NOTE: THE DIRECTION OF THE MESHING TEETH OF THE PAWL AND RATCHET WHEEL MUST BE AS SHOWN IN DIAGRAM 2A.
3. INSERT PAWL SPRING (20) INTO THE POCKET IN THE RIGHT SIDE DRIVE PLATE.
4. SLIDE THE LEFT SIDE DRIVE PLATE ONTO THE RATCHET WHEEL HUB.
5. THE DRIVE PLATE PIN (24) CAN THEN BE INSERTED IN EACH OF THE DRIVE PLATES.
6. PLACE THE RETAINING RINGS (23) ON THE DRIVE PLATE PIN. THIS WILL HOLD THE DRIVE PLATE ASSEMBLY TOGETHER.


**NOTE: ONCE ASSEMBLED, ONE SHOULD BE ABLE TO ROTATE THE RATCHET WHEEL WHILE HOLDING THE DRIVE PLATES STATIONARY. REVERSE ROTATION OF THE RATCHET WHEEL SHOULD TURN THE ENTIRE ASSEMBLY, WHICH WOULD INDICATE THE TEETH ARE MESHING PROPERLY. IF EITHER OF THE BEFORE-MENTIONED IS NOT THE CASE SOMETHING IS IMPROPERLY ASSEMBLED.

 = USE LUBRICATION IN THIS AREA

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED	
MATERIAL	ENG APPR.	MFG APPR.	TITLE:
HEAT TREAT	Q.A.		SIZE B DWG. NO. REV
FINISH	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		SCALE: 1:4 WEIGHT: SHEET 6 OF 18

QD4 HOUSING BUSHING & BOSS BUSHING ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

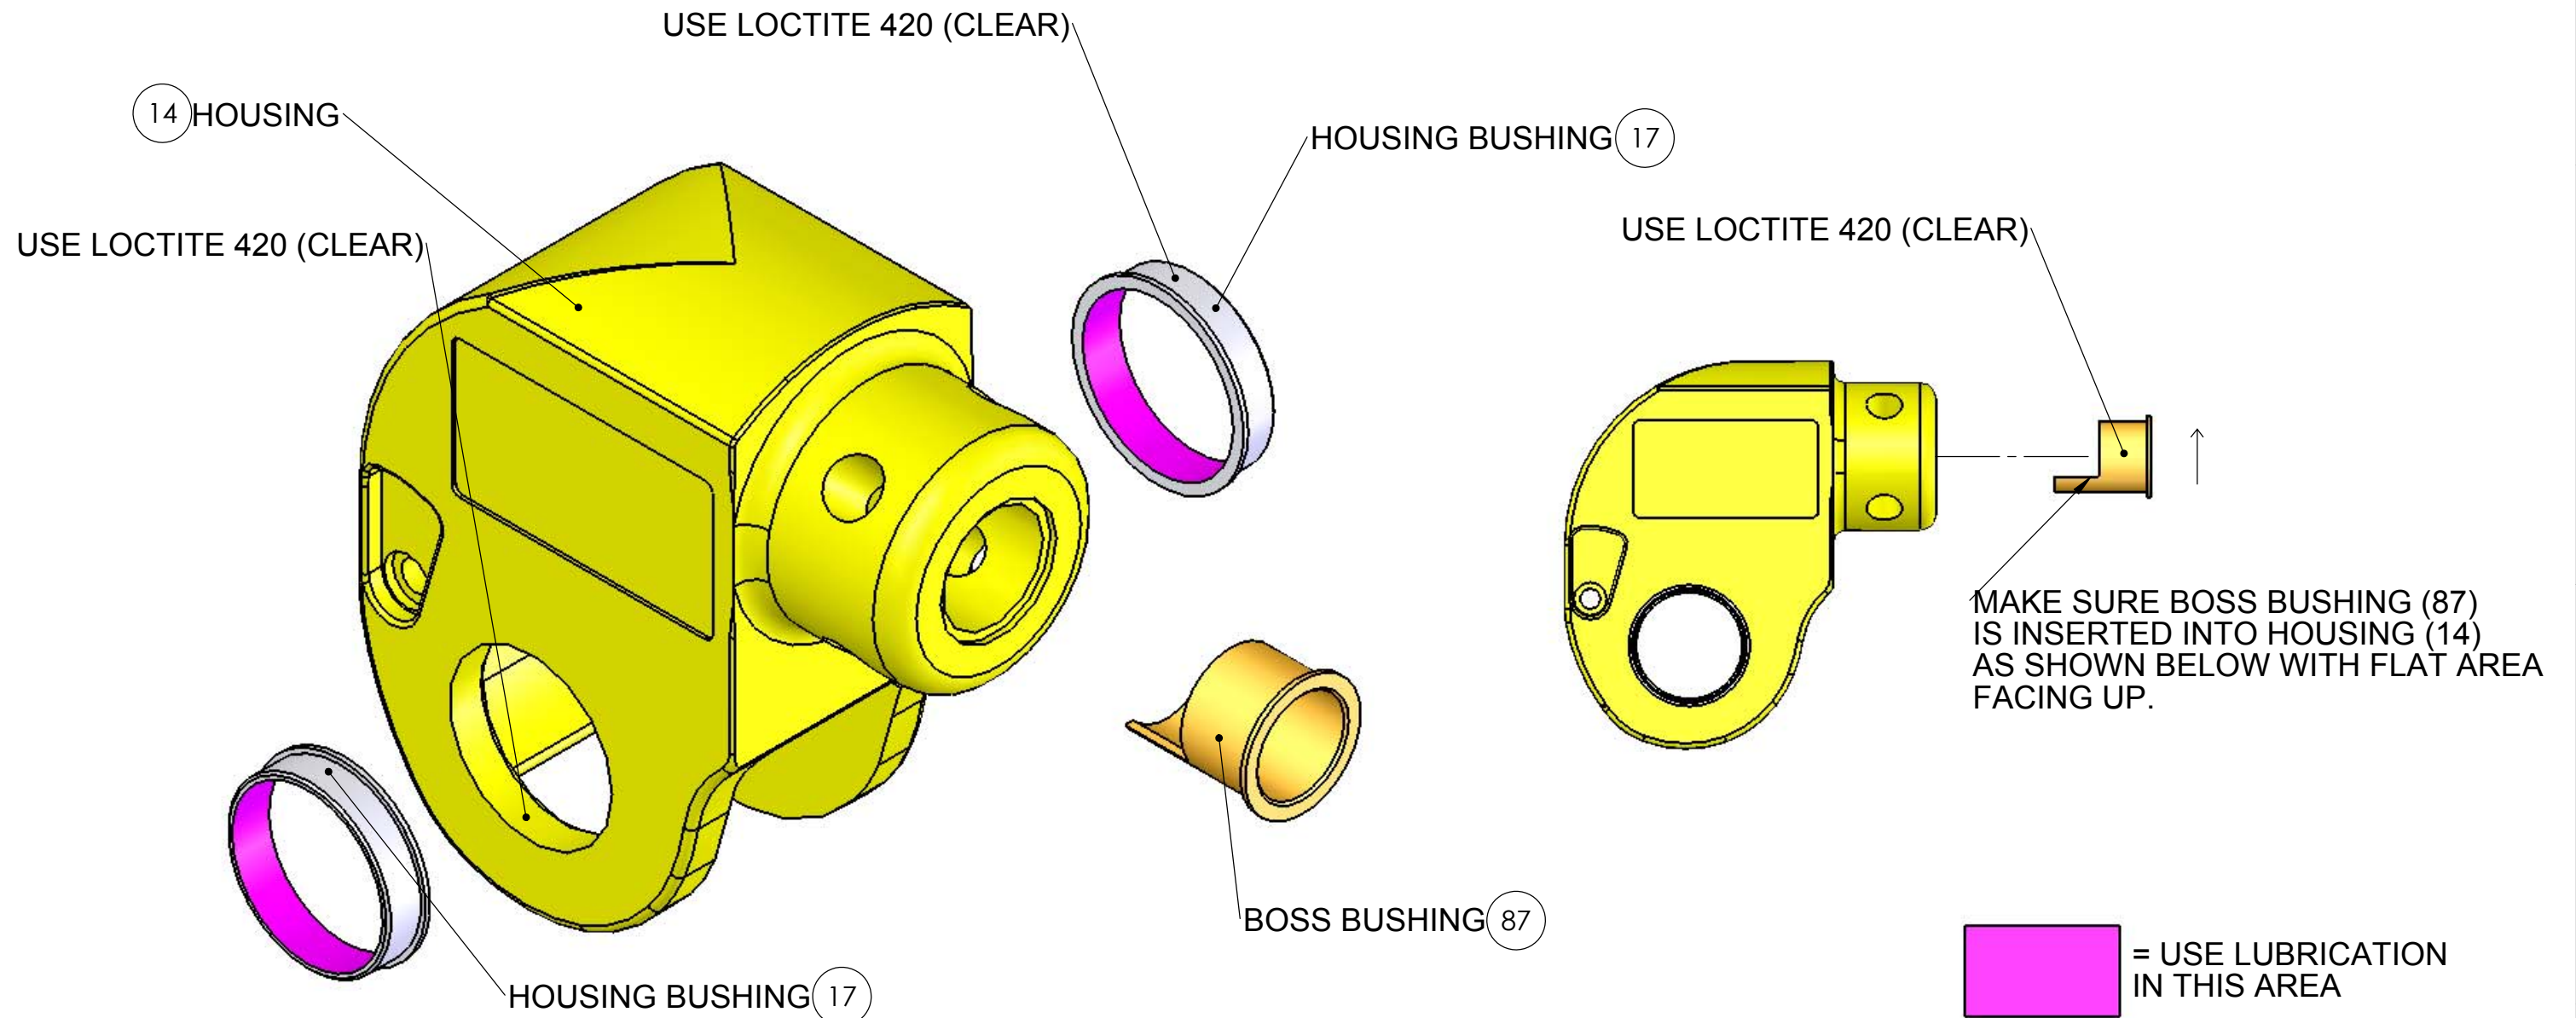

ASSEMBLY INSTRUCTIONS



1. INSERT HOUSING BUSHINGS (17) FROM THE INSIDE OF THE HOUSING (14) WITH THE BUSHING FACING THE DIRECTION SHOWN.
**** NOTE: HOUSING BUSHING MUST BE FULLY SEATED IN THE HOUSING.**

USE LOCTITE # 420 TO GLUE HOUSING BUSHINGS(17) TO HOUSING(14).
 LUBRICATE PARTS AS SHOWN.

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED	
MATERIAL	ENG APPR.	MFG APPR.	CUSTOMER:
HEAT TREAT	Q.A.		TITLE:
FINISH	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		SIZE B
			DWG. NO.
	SCALE: 1:4	WEIGHT:	SHEET 7 OF 18

QD4 SWIVEL ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

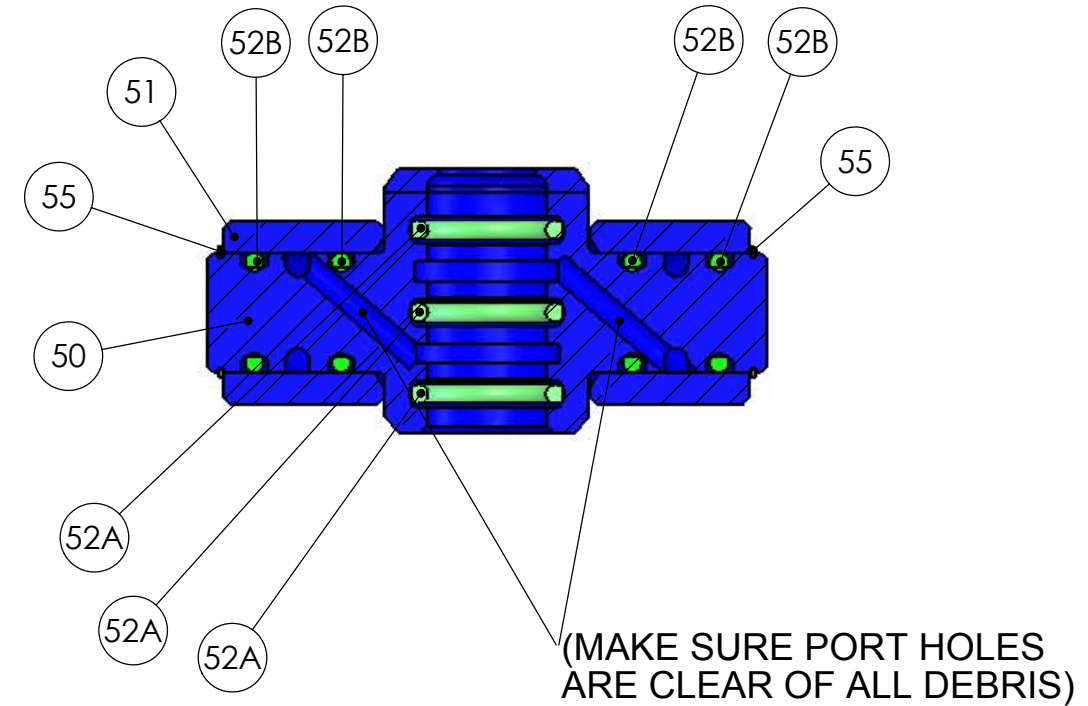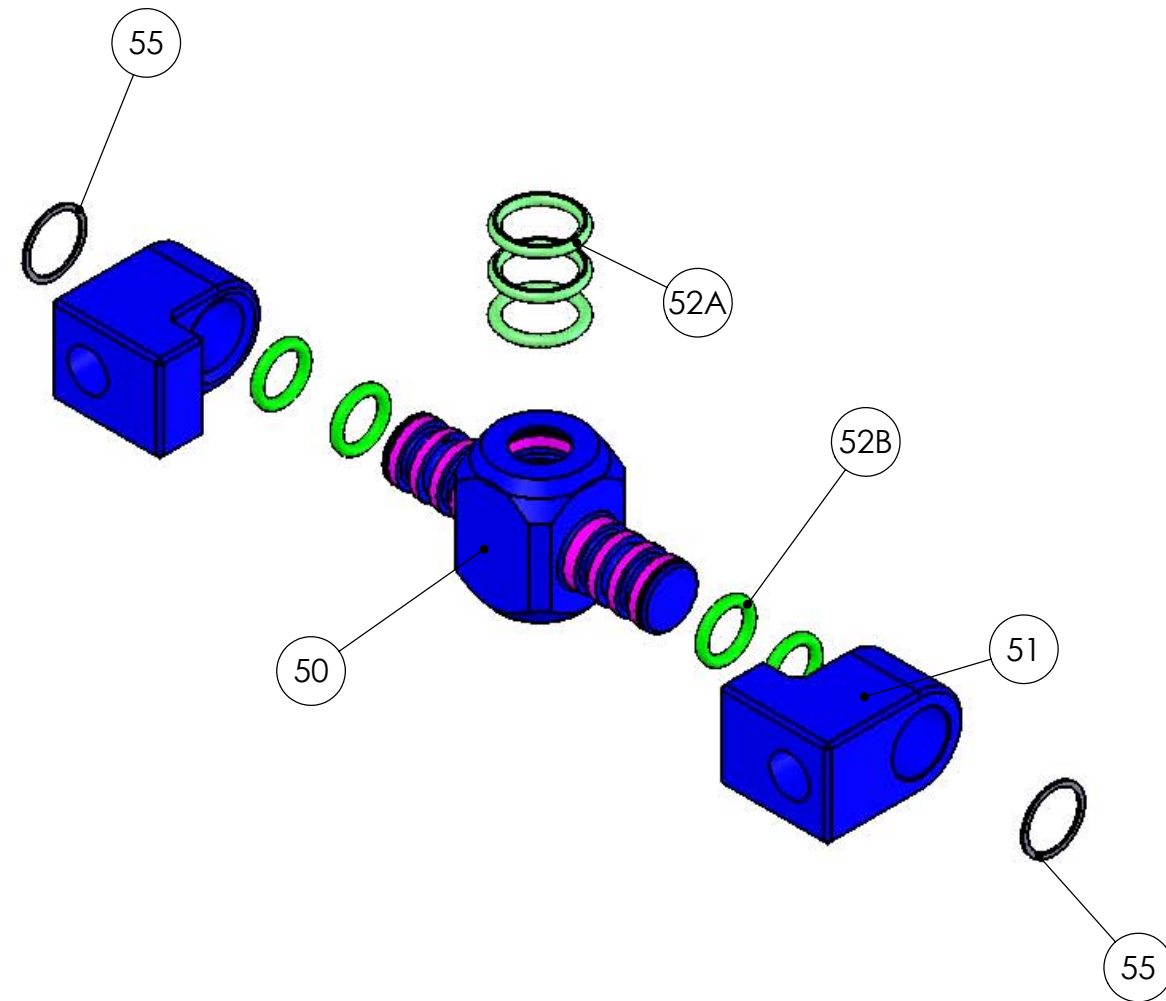


ASSEMBLY INSTRUCTIONS

1. INSERT SWIVEL POST O-RINGS (ITEM 52A) INTO SWIVEL BODY (ITEM 50) AS SHOWN IN SECTION A-A.
2. SLIDE SWIVEL ARM O-RINGS (ITEM 52B) OVER SWIVEL BODY AS SHOWN IN SECTION A-A
3. SLIDE SWIVELS (ITEM 51) OVER SWIVEL BODY AND SECURE WITH SWIVEL SNAP RINGS (ITEM 55) AS SHOWN IN SECTION A-A.

NOTE: USING A PIECE OF WIRE, MAKE SURE PORT HOLES ARE CLEAR OF DEBRIS.

ALL O-RINGS COME IN THE SWIVEL SEAL KIT (ITEM52)


 = USE LUBRICATION IN THIS AREA

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN		
MATERIAL	CHECKED		TITLE:
HEAT TREAT	ENG APPR.		SIZE B DWG. NO. REV
FINISH	MFG APPR.		SCALE: 1:2 WEIGHT: SHEET 8 OF 18
	Q.A.		


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.

QD4 FITTING ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

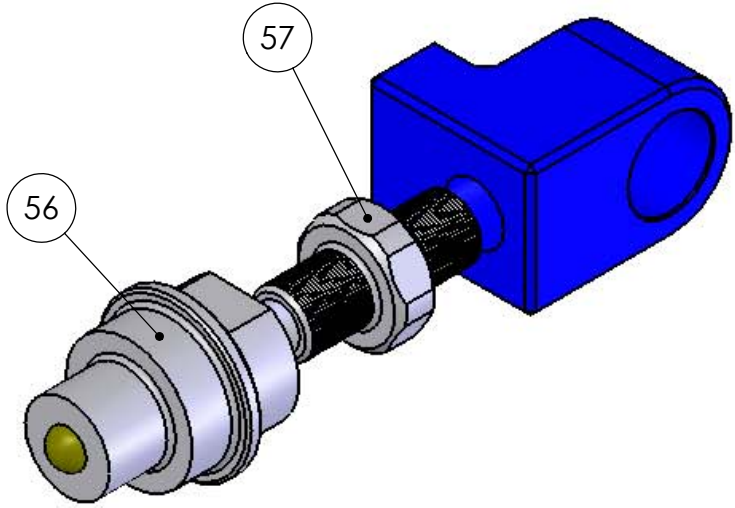

BEFORE ASSEMBLY

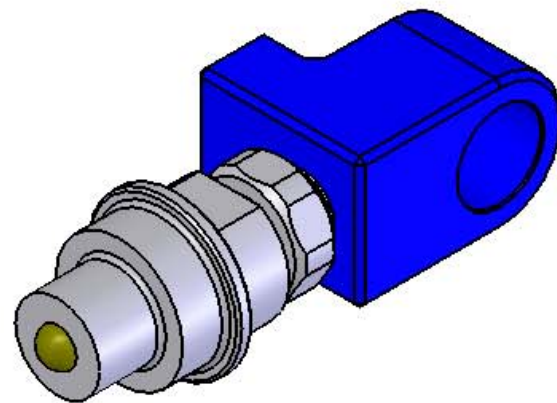


AFTER ASSEMBLY

HIGH PRESSURE (MALE-END) HYDRAULIC CONNECTOR ASSEMBLY 2HM


ASSEMBLY INSTRUCTIONS

1. THREAD MALE QUICK CONNECT (ITEM 56) INTO NIPPLE (ITEM 57)
2. THREAD ASSEMBLED ITEMS 56 & 57 INTO HYDRAULIC SUB-ASSEMBLY 1H.

NOTE:
(THE USE OF SEALING PIPE TAPE ON THREADED PORTIONS OF FITTING IS RECOMMENDED TO ASSURE A PROPER SEAL)

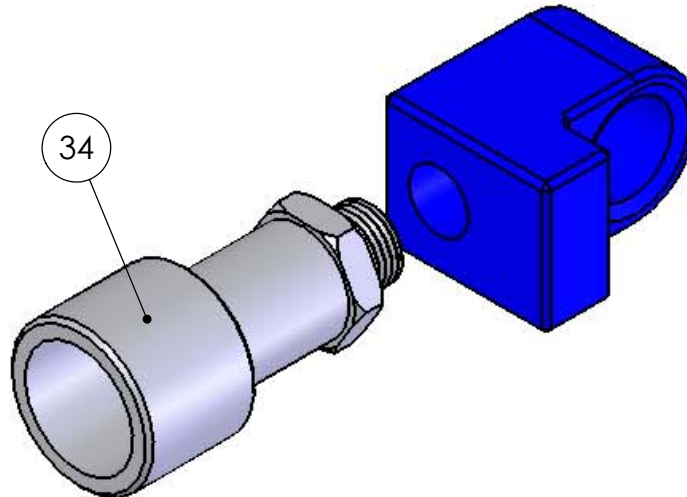

BEFORE ASSEMBLY

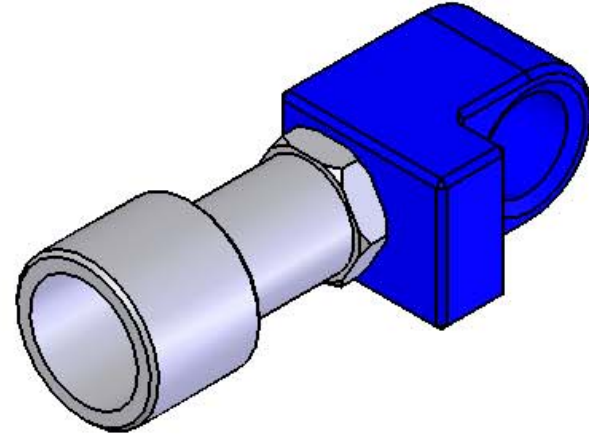

AFTER ASSEMBLY

LOW PRESSURE (FEMALE-END) HYDRAULIC CONNECTOR ASSEMBLY 2HF

ASSEMBLY INSTRUCTIONS

1. THREAD FEMALE QUICK CONNECT (ITEM 54) INTO HYDRAULIC SUB-ASSEMBLY 1H.

NOTE:
(THE USE OF SEALING PIPE TAPE ON THREADED PORTIONS OF FITTING IS RECOMMENDED TO ASSURE A PROPER SEAL)


SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH <small>We Own the Future of Bolting Technology</small>	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN			CUSTOMER:
	CHECKED		TITLE:	
	ENG APPR.		SIZE B	DWG. NO.
	MFG APPR.		REV	
MATERIAL	Q.A.		SCALE: 1:2	
HEAT TREAT	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		WEIGHT:	
FINISH			SHEET 9 OF 18	

QD4 CYLINDER ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

ASSEMBLY INSTRUCTIONS:

1. INSTALL ROD SEAL(49) IN CYLINDER(4) WITH O-RING FACING ENDCAP(8).
2. INSERT ROD SEAL BUSHING(6) AND TIGHTEN WITH THE ROD BUSHING WRENCH (SEE SHEET 18)(ITEM 80). ****NON-PERMANENT THREAD LOCKER SHOULD BE USED****
3. INSTALL WEAR RING(49) AND SEAL(49) ON PISTON(1) (SEAL SHOULD FACE ENDCAP).
4. AFTER PLACING THE PISTON CONE (90) ON THE END OF THE PISTON PRESS THE PISTON(1) INTO CYLINDER(4) CAREFULLY (DO NOT DAMAGE SEALS).
5. PLACE END CAP SEAL(49) INTO CYLINDER(4) WITH O-RING FACING PISTON(1).
6. THREAD ENDCAP(8) INTO CYLINDER(4) AND TIGHTEN WITH END CAP WRENCH (SEE SHEET 18)(ITEM 81).
7. INSTALL SWIVEL POST(50) USING THE SWIVEL CAP SCREWS ASSURING THE O-RINGS(52) LINE UP PROPERLY WITH HOLES IN CYLINDER(4).

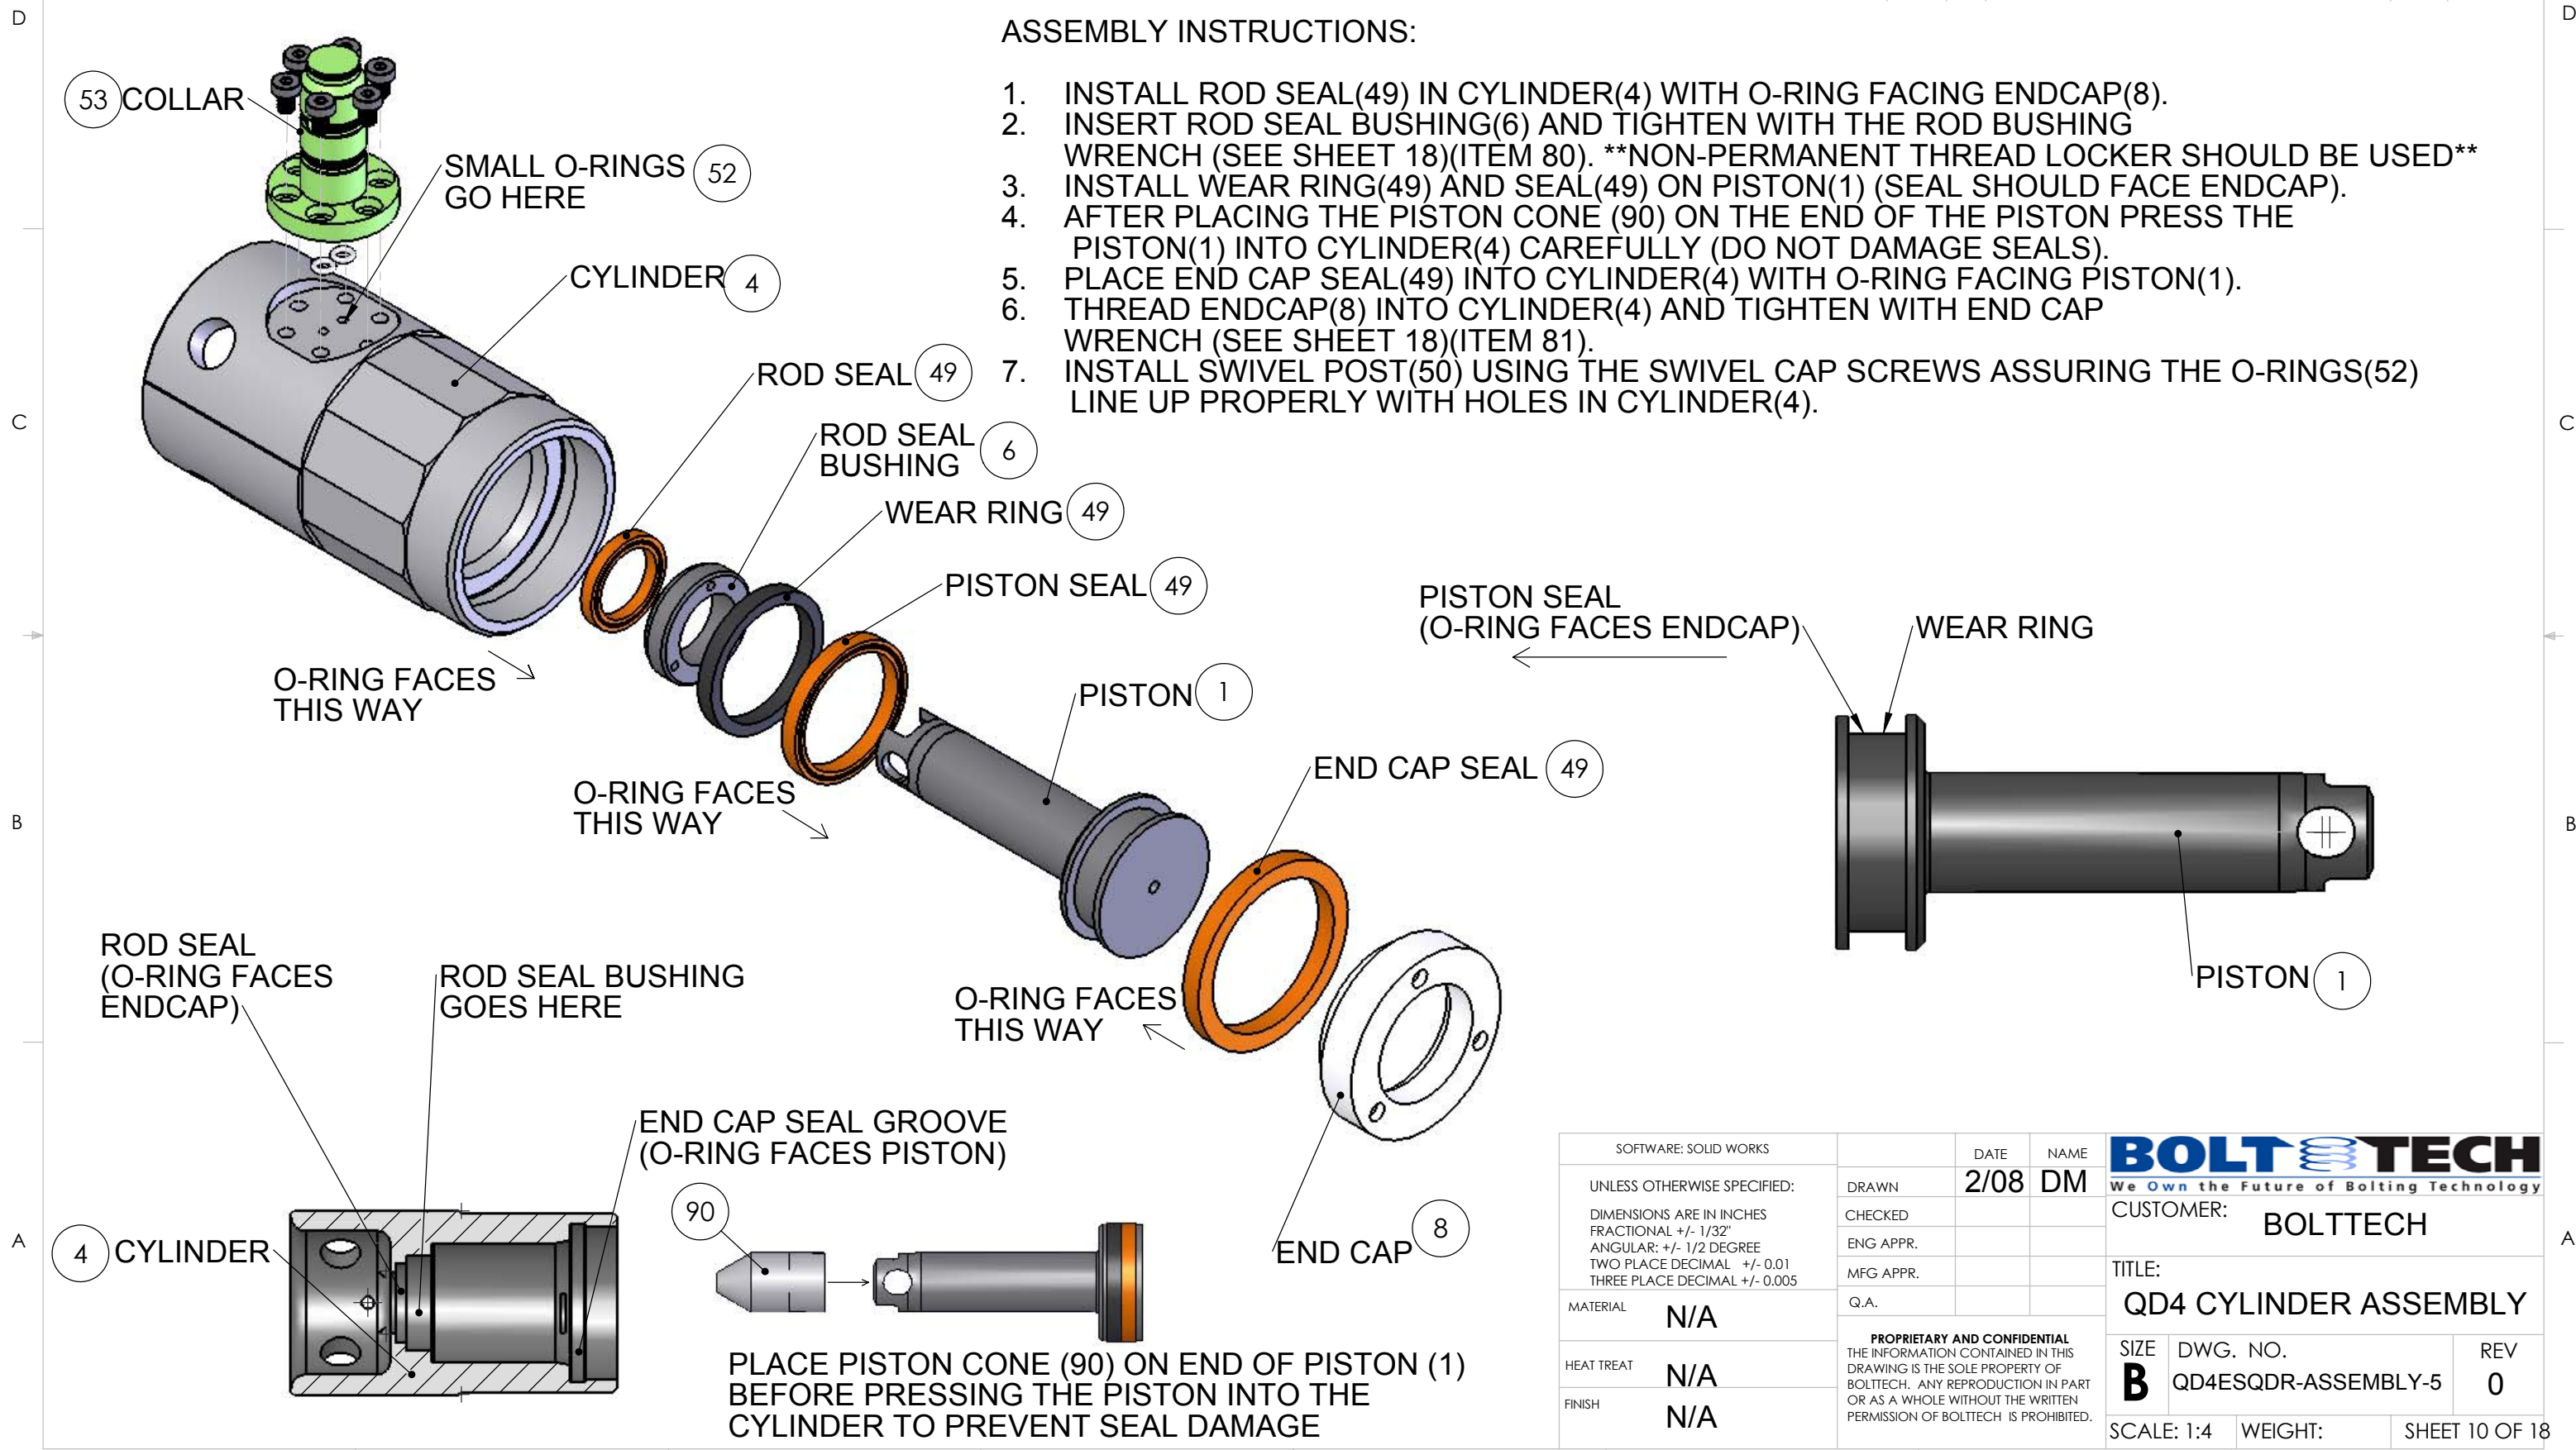

SOFTWARE: SOLID WORKS	DATE	NAME
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	2/08	DM
MATERIAL	DRAWN	ENG APPR.
N/A	CHECKED	MFG APPR.
HEAT TREAT	Q.A.	
N/A		
FINISH		
N/A		

BOLT TECH
We Own the Future of Bolting Technology

CUSTOMER: **BOLTTECH**

TITLE: **QD4 CYLINDER ASSEMBLY**



SIZE **B** DWG. NO. **QD4ESQDR-ASSEMBLY-5** REV **0**

SCALE: 1:4 WEIGHT: SHEET 10 OF 18

PLACE PISTON CONE (90) ON END OF PISTON (1) BEFORE PRESSING THE PISTON INTO THE CYLINDER TO PREVENT SEAL DAMAGE

QD4 2ND PAWL ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

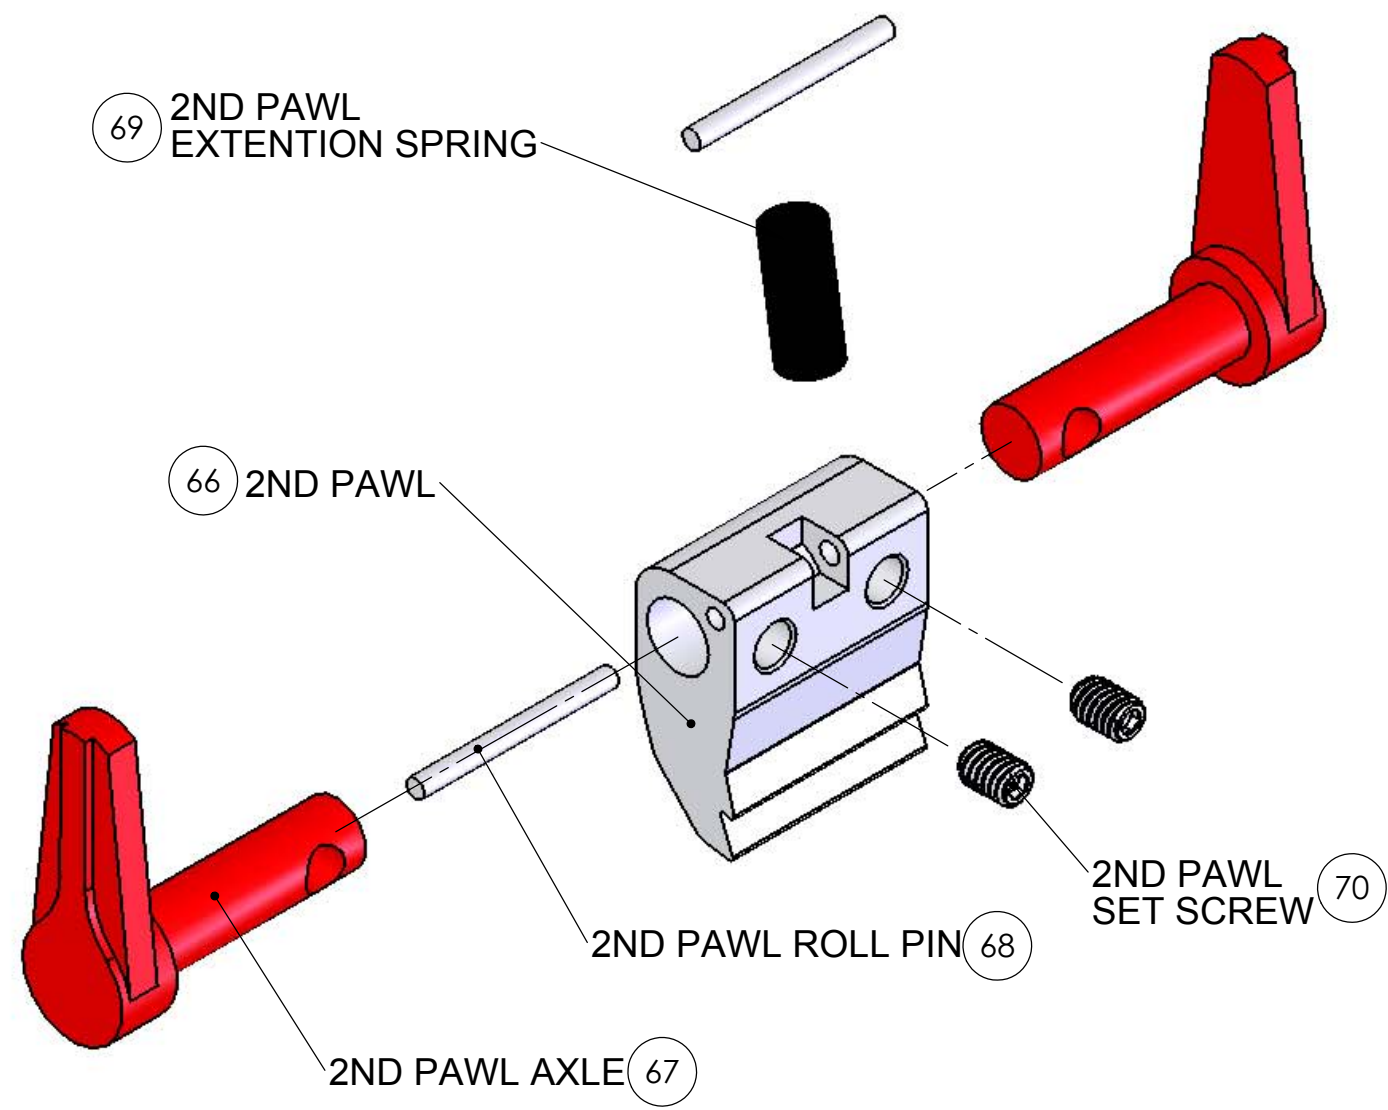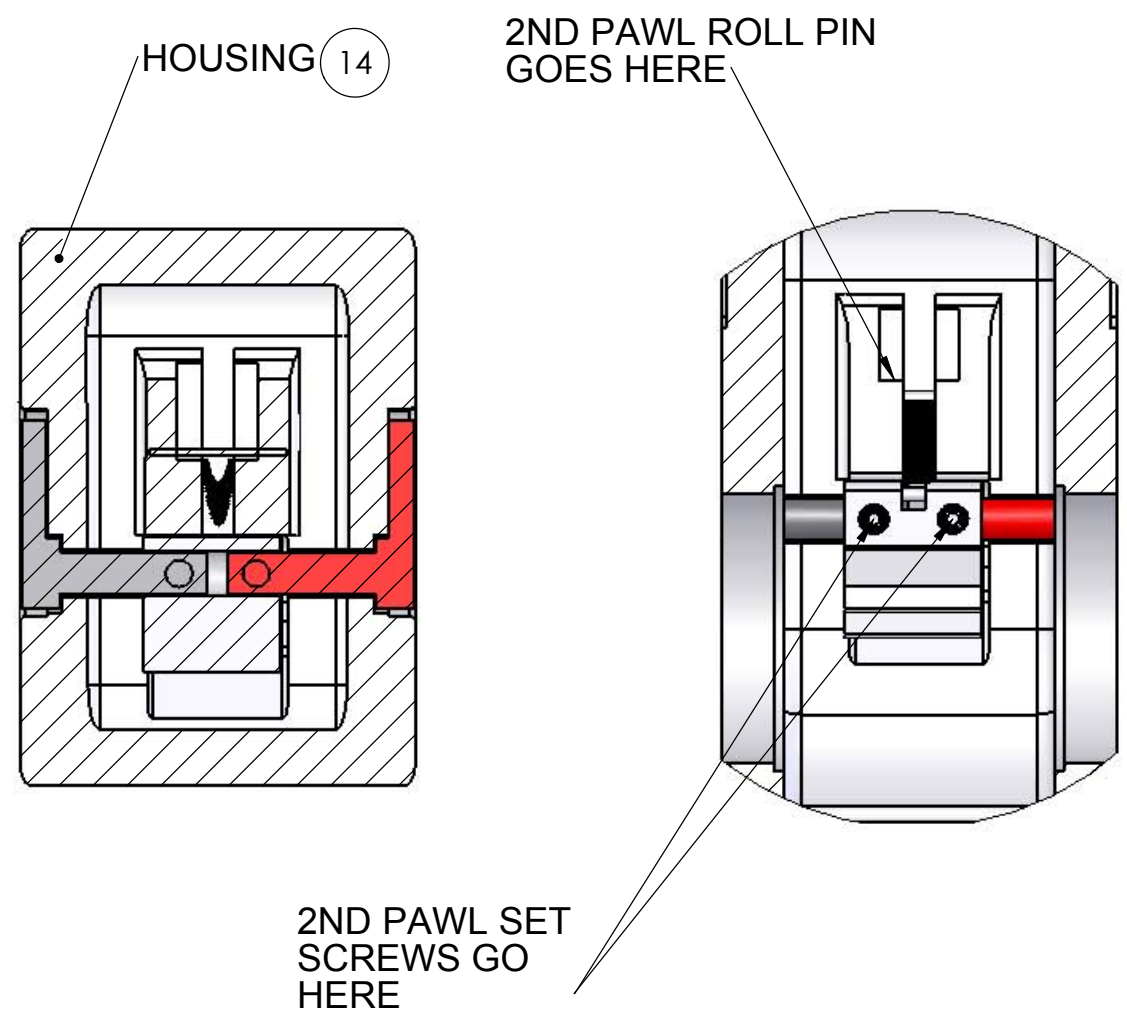

ASSEMBLY INSTRUCTIONS

1. INSERT 2ND PAWL EXTENSION SPRING (ITEM 69) AS SHOWN THEN SLIDE 2ND PAWL ROLL PIN (ITEM 68) INTO PLACE.
2. INSERT 2ND PAWL ROLL PIN (ITEM 68) THROUGH 2ND PAWL EXTENSION SPRING. PLACE 2ND PAWL ROLL PIN INTO SLOT PROVIDED IN HOUSING THEN PULL ASSEMBLED 2ND PAWL DOWN INTO POCKET.
3. INSERT 2ND PAWL AXLES (ITEMS 67) INTO HOUSING AND INTO 2ND PAWL ASSEMBLY. ALIGN HOLE IN HOUSING WITH THREADED HOLE IN 2ND PAWL ASSEMBLY. THREAD 2ND PAWL SET SCREWS (ITEMS 68) INTO THREADED HOLE IN 2ND PAWL. TIGHTEN 2ND PAWL SET SCREWS WITH ALLEN WRENCH.

NOTE: A NON-PERMANENT THREAD SEIZING COMPOUND SUCH AS (LOCTITE 567 PST PIPE SEALANT) SHOULD BE USED TO PREVENT 2ND PAWL SET SCREWS FROM COMING LOOSE.


SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED	
MATERIAL	ENG APPR.	MFG APPR.	TITLE:
HEAT TREAT	Q.A.		SIZE B DWG. NO. REV
FINISH	<p>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.</p>		SCALE: 1:2 WEIGHT: SHEET 11 OF 18

QD4 HOUSING ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

ASSEMBLY STEPS

1. PLACE DRIVE PLATE ASSEMBLY INTO HOUSING(14).
(MAKE SURE CONNECTING ROD(85) IS FACING AS SHOWN)
2. PLACE SQUARE DRIVE(40) THROUGH HOUSING(14) AND DRIVE PLATES(18,19).
3. PLACE DRIVE CAP(41) OVER END OF SQUARE DRIVE(40).
4. TIGHTEN THUMB WHEEL(42).



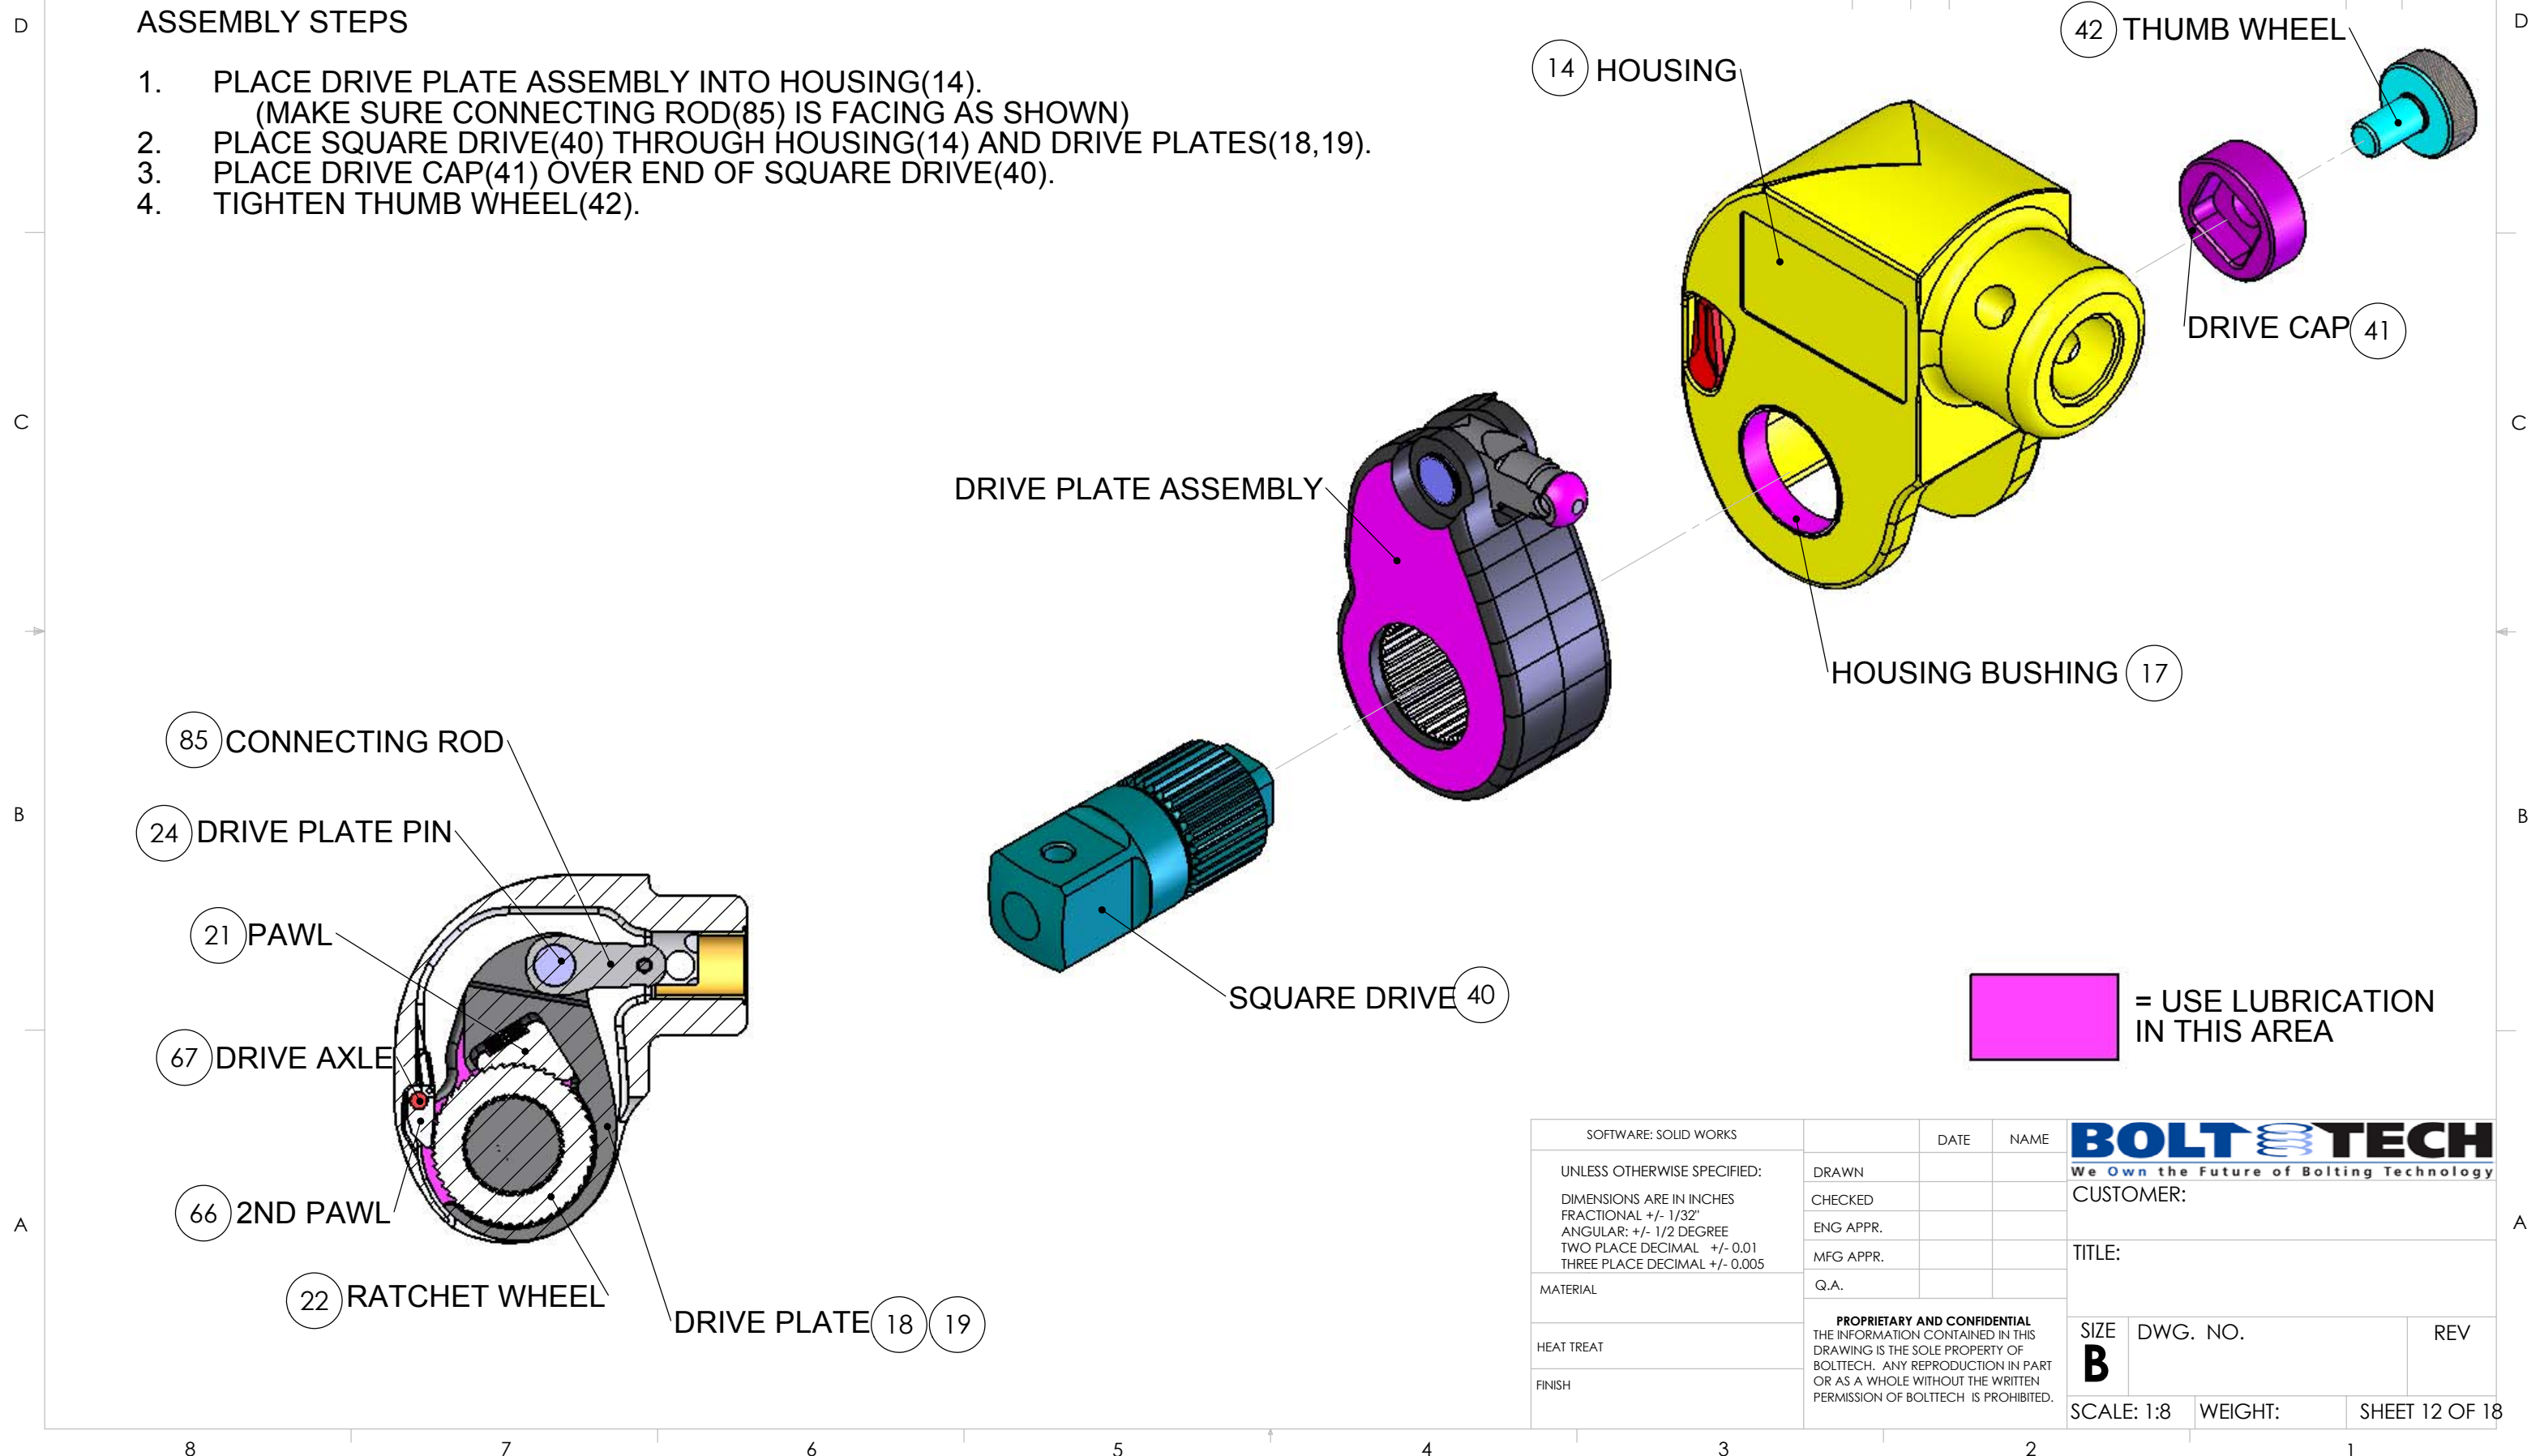



= USE LUBRICATION IN THIS AREA

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED	
MATERIAL	ENG APPR.	MFG APPR.	TITLE:
HEAT TREAT	Q.A.		SIZE B DWG. NO. REV
FINISH	<p><small>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.</small></p>		SCALE: 1:8 WEIGHT: SHEET 12 OF 18

QD4 ENGAGEMENT BOLT ATTACHMENT

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

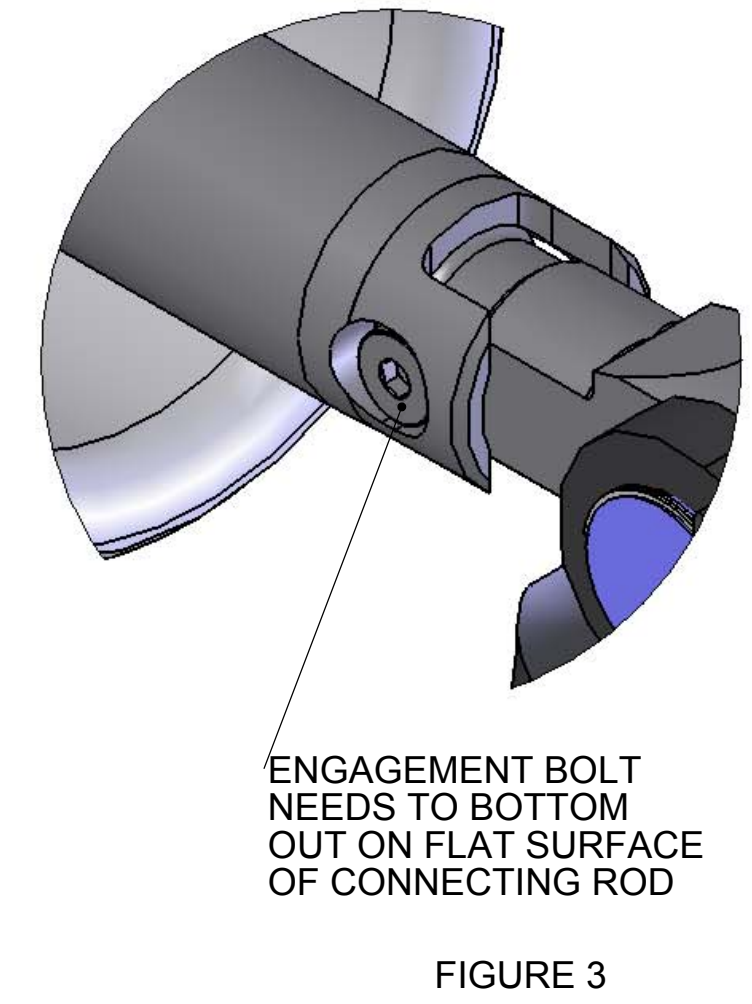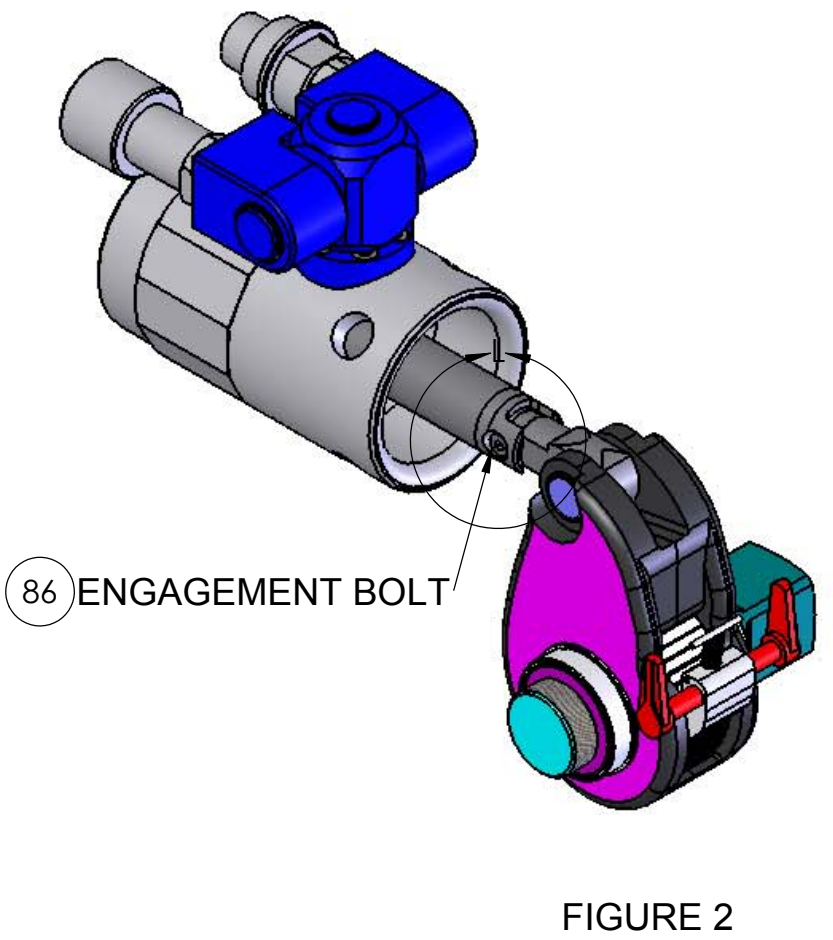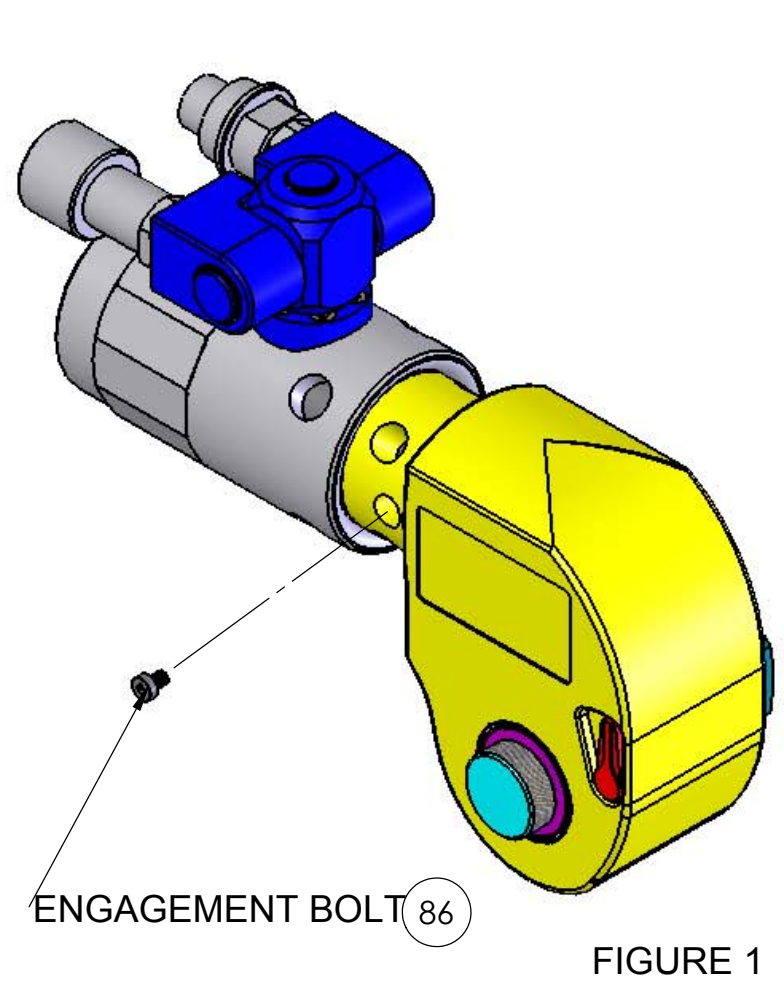

 = USE LUBRICATION IN THIS AREA

ASSEMBLY INSTRUCTIONS:

1. ALIGN THE CONNECTING ROD AND THE END OF THE PISTON SO THEY SLIDE TOGETHER SMOOTHLY (SHOWN IN FIGURE 2).
****NOTE: MAKE SURE BOTH THE PISTON END AND THE CONNECTING ROD ARE LUBRICATED BEFORE ASSEMBLING.**
2. WITH THE HOLES LINED UP, THREAD THE ENGAGEMENT BOLT(86) UNTIL IT BOTTOMS OUT ON THE FLAT SURFACE OF THE CONNECTING ROD (SHOWN IN FIGURE 3).


SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN		CUSTOMER:	
	CHECKED		TITLE:	
	ENG APPR.		SIZE	DWG. NO.
	MFG APPR.		B	REV
MATERIAL	Q.A.		SCALE: 1:2	WEIGHT:
HEAT TREAT	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		SHEET 13 OF 18	
FINISH				

QD4 HOUSING/CYLINDER ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

FINAL INSTALATION

1. ALIGN CYLINDER(4) AND HOUSING(14) HOLES.
2. TIGHTEN TAPERED BOLTS(27) IN A CRISS CROSS PATTERN TO 8 ft-lb.

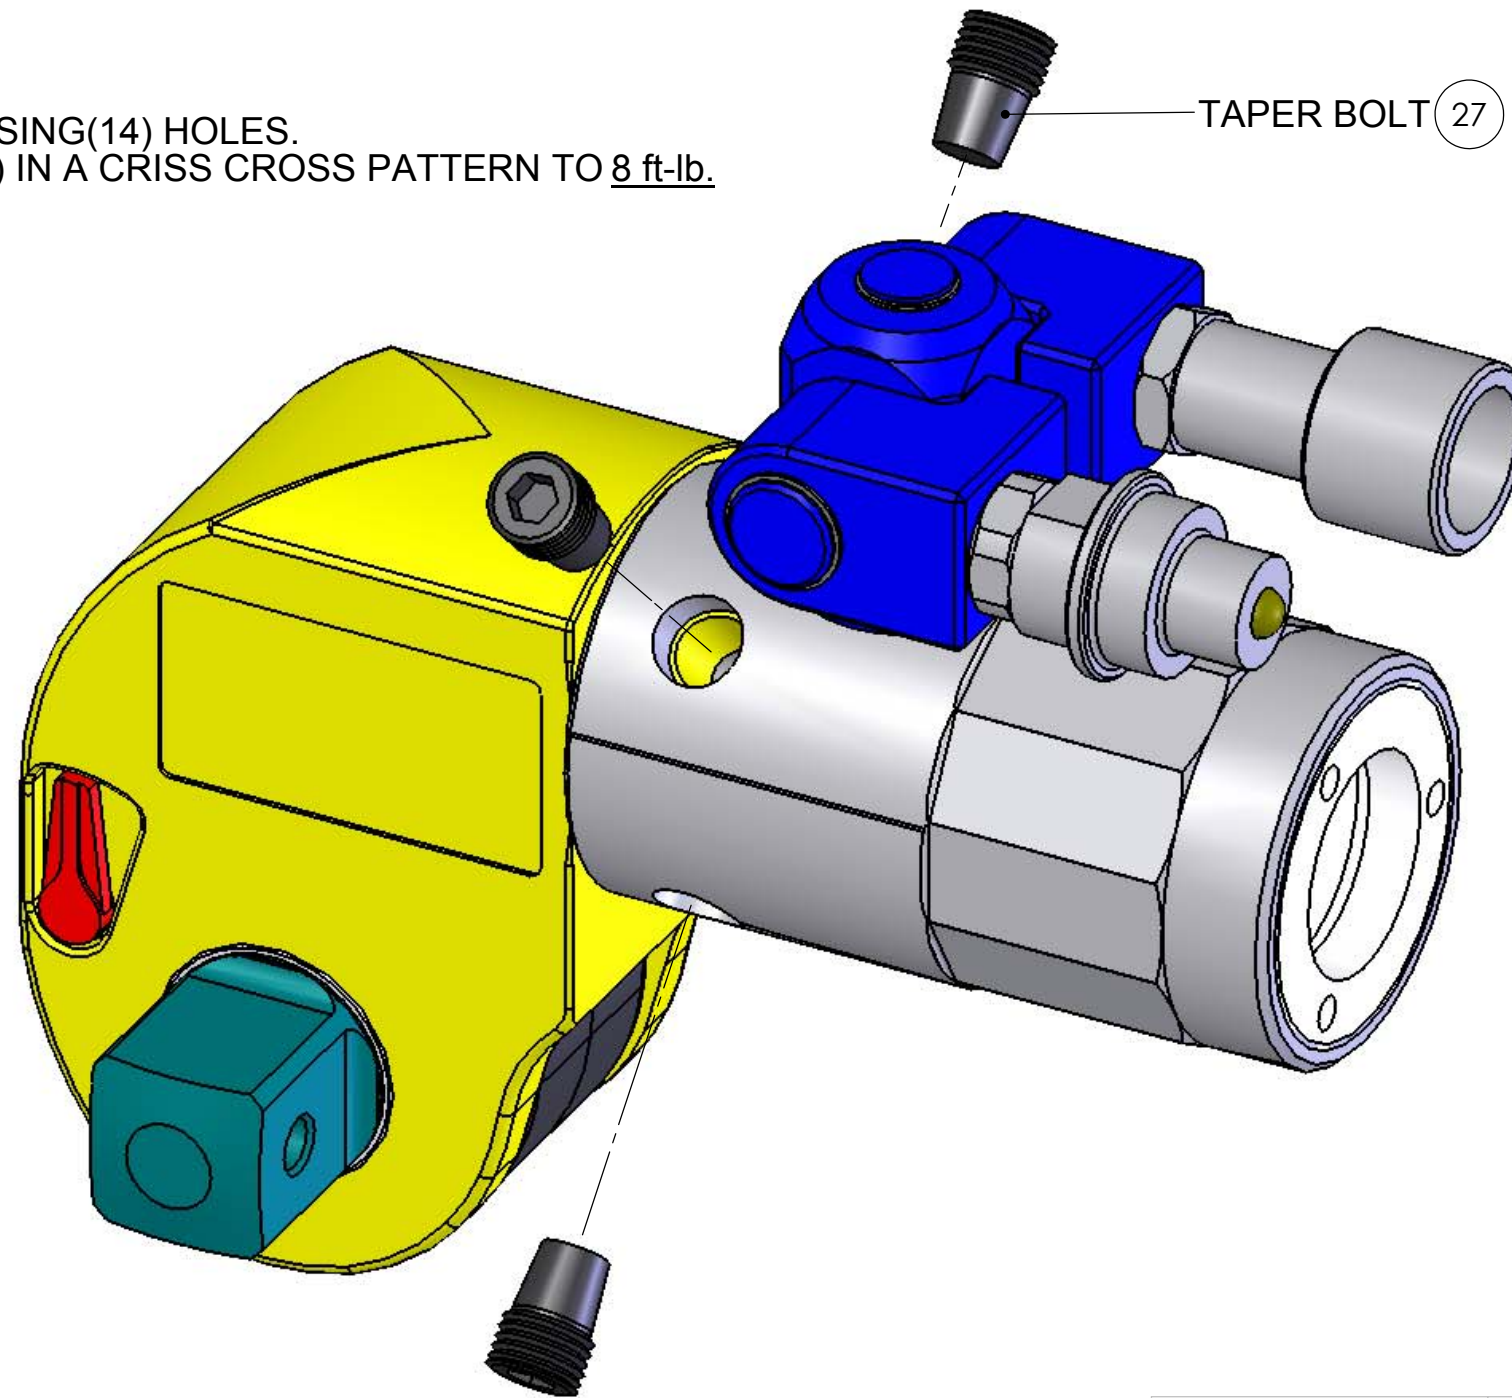

TAPER BOLT (27)


ASSEMBLY INSTRUCTIONS

1. FULLY EXTEND PISTON(1).
2. FULLY RETRACT DRIVE PLATES(18,19).
3. LUBRICATE SPHERICAL BALL ON CONNECTING ROD(85).
4. ATTACH ONE END OF CONNECTING ROD(85) TO DRIVE PLATE(18 OR 19) USING DRIVE PLATE PIN(26).
5. SECURE DRIVE PLATE PIN(26) WITH A SNAP RING(23) ON EACH SIDE.

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED	
MATERIAL	ENG APPR.	MFG APPR.	CUSTOMER:
HEAT TREAT	Q.A.		TITLE:
FINISH	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		SIZE B
			DWG. NO.
	SCALE: 1:4	WEIGHT:	SHEET 14 OF 18

QD4 REACTION BAR ASSEMBLY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

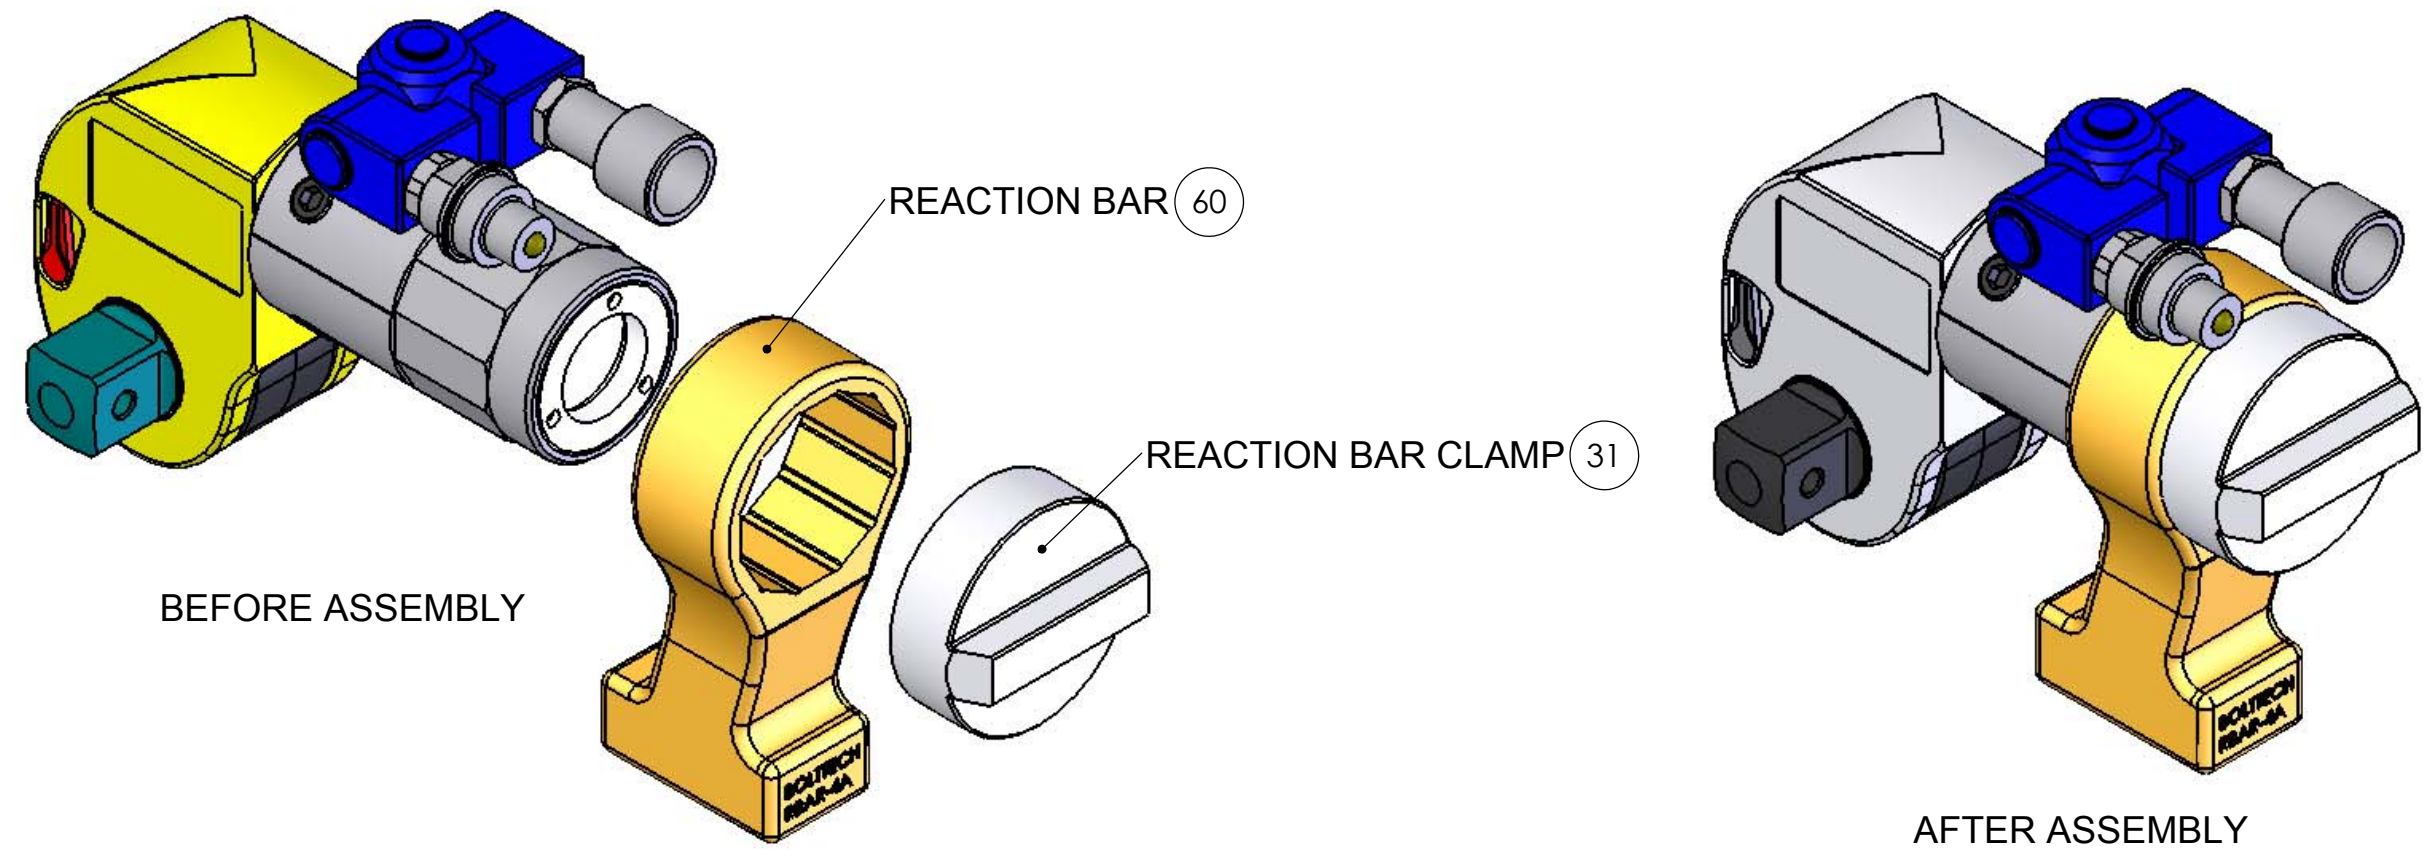

ASSEMBLY INSTRUCTIONS


1. SLIDE REACTION BAR(60) OVER CYLINDER AS SHOWN
2. THREAD REACTION BAR CLAMP (31) ONTO CYLINDER END CAP.

SOFTWARE: SOLID WORKS	DATE	NAME	BOLT TECH We Own the Future of Bolting Technology	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN			CUSTOMER:
MATERIAL	CHECKED			TITLE:
HEAT TREAT	ENG APPR.			SIZE DWG. NO. REV
FINISH	MFG APPR.		SCALE: 1:2 WEIGHT: SHEET 15 OF 18	
	Q.A.			
	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTECH IS PROHIBITED.			


8 7 6 5 4 3 2 1

QD4 REACTION BAR

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

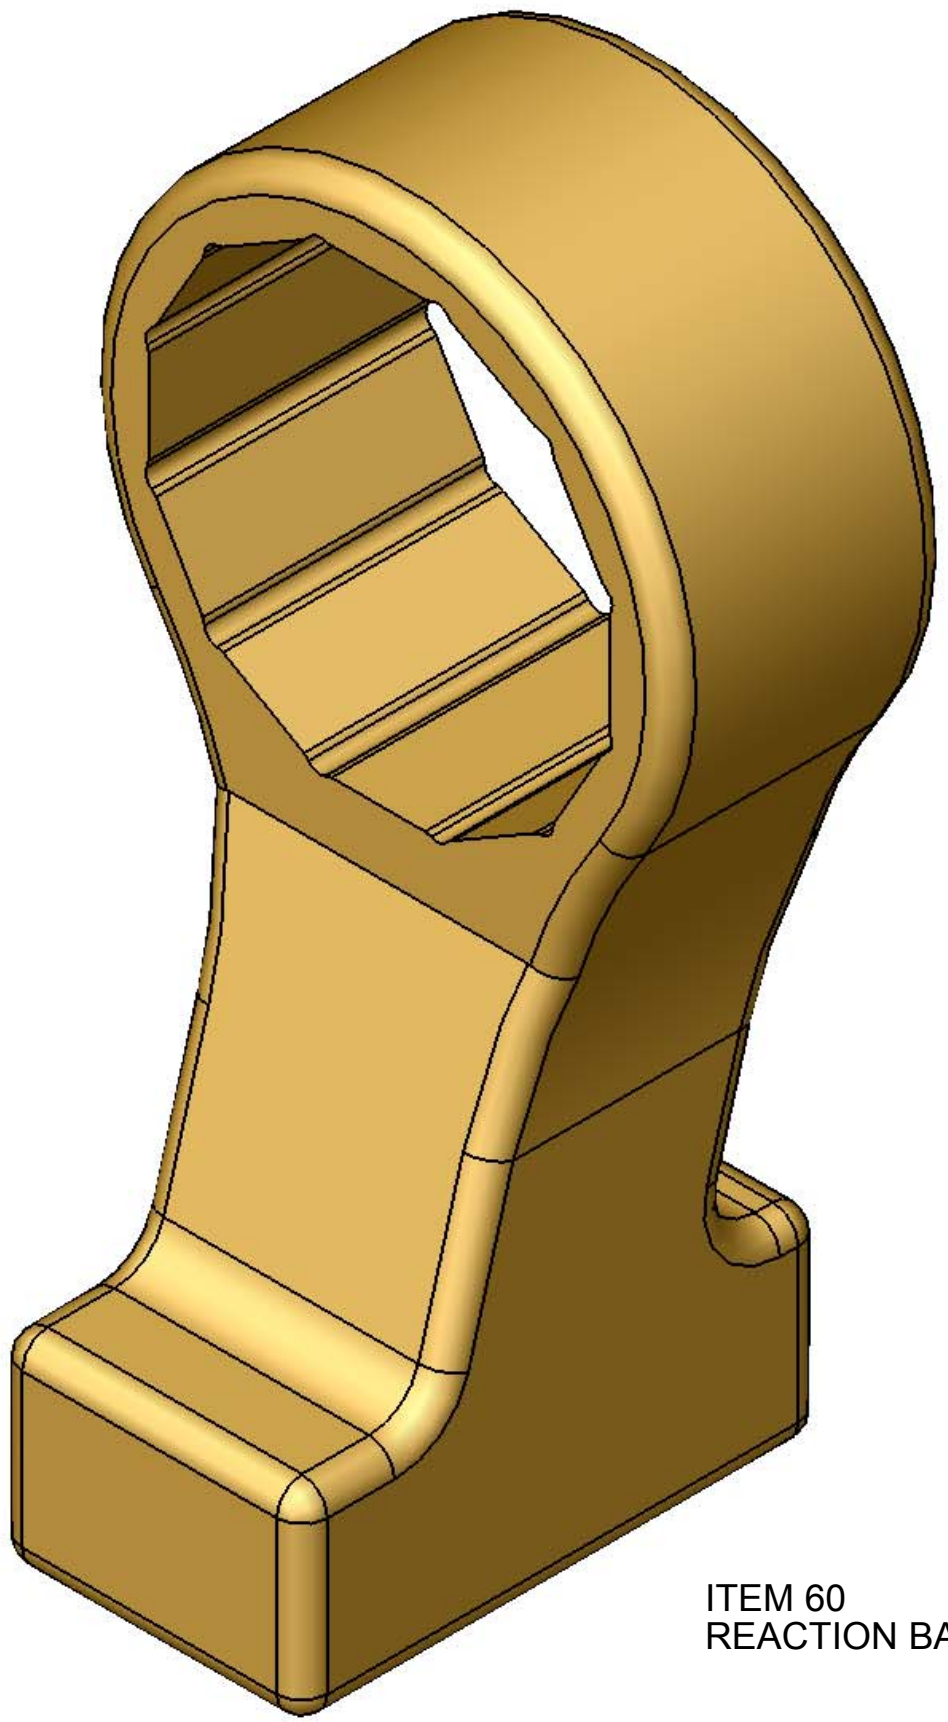

ITEM 60
REACTION BAR


SOFTWARE: SOLID WORKS	DATE	NAME	 We Own the Future of Bolting Technology CUSTOMER: TITLE: SIZE B DWG. NO. REV SCALE: 1:2 WEIGHT: SHEET 16 OF 18
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN		
	CHECKED		
	ENG APPR.		
	MFG APPR.		
MATERIAL	Q.A.		
HEAT TREAT	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.		
FINISH			

D
C
B
A


D
C
B
A

8 7 6 5 4 3 2 1


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

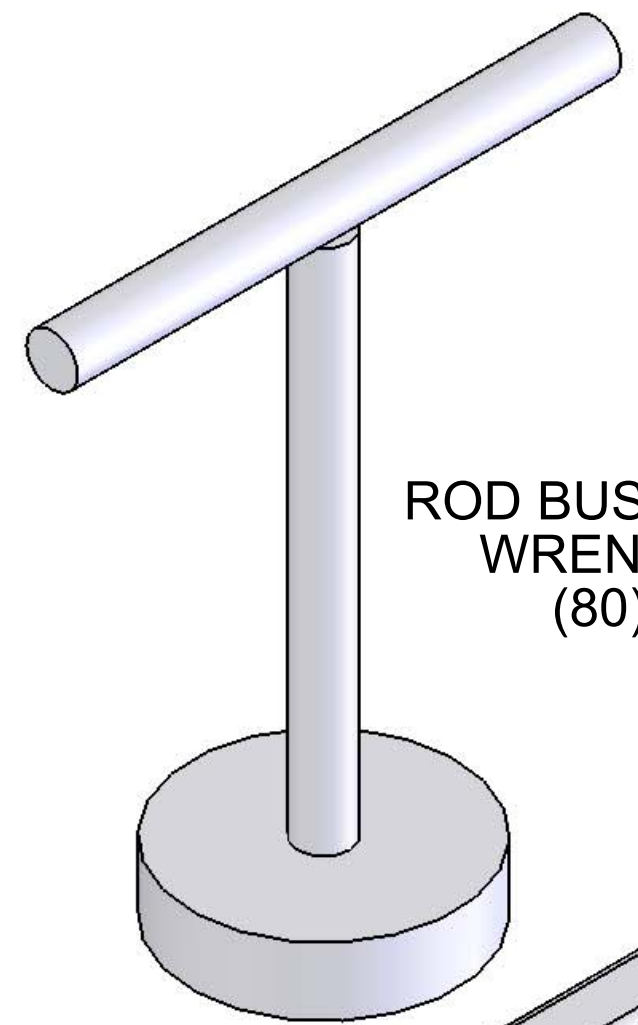

ROD BUSHING WRENCH (80)

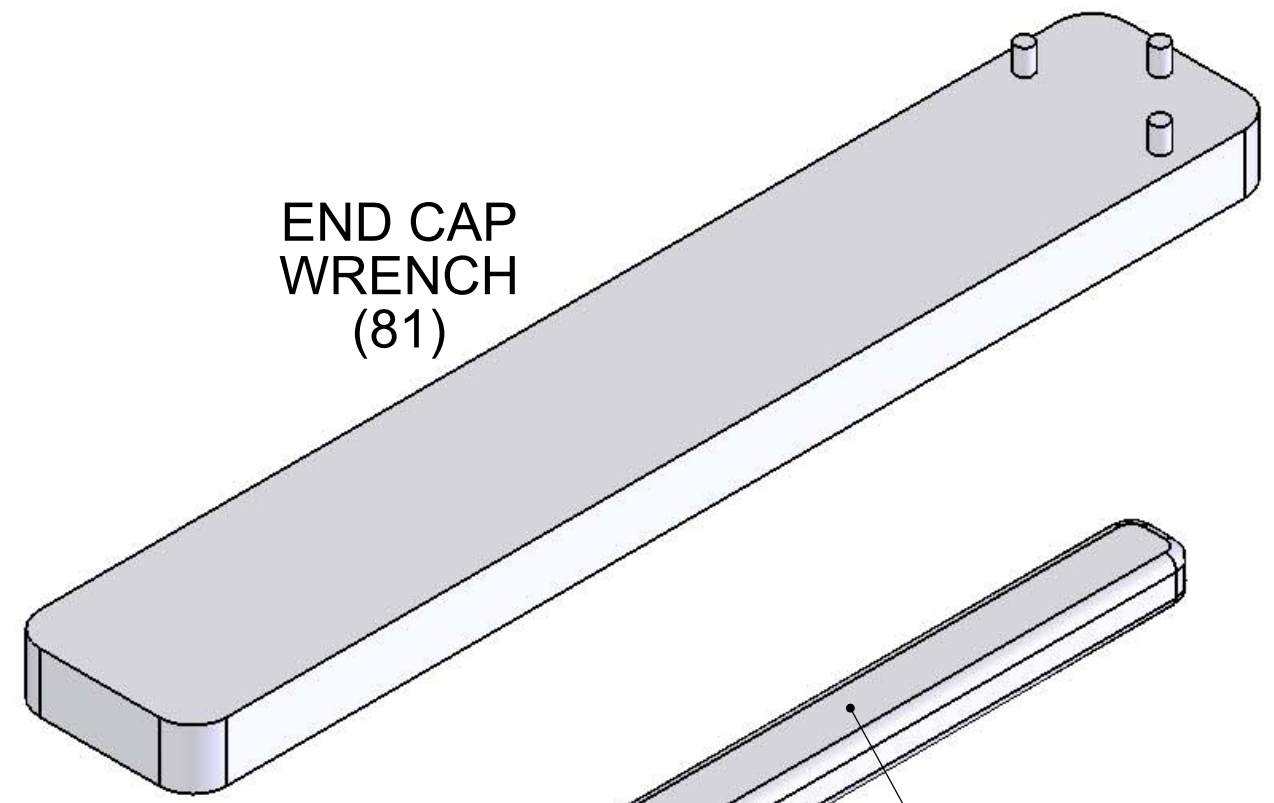


END CAP WRENCH (81)

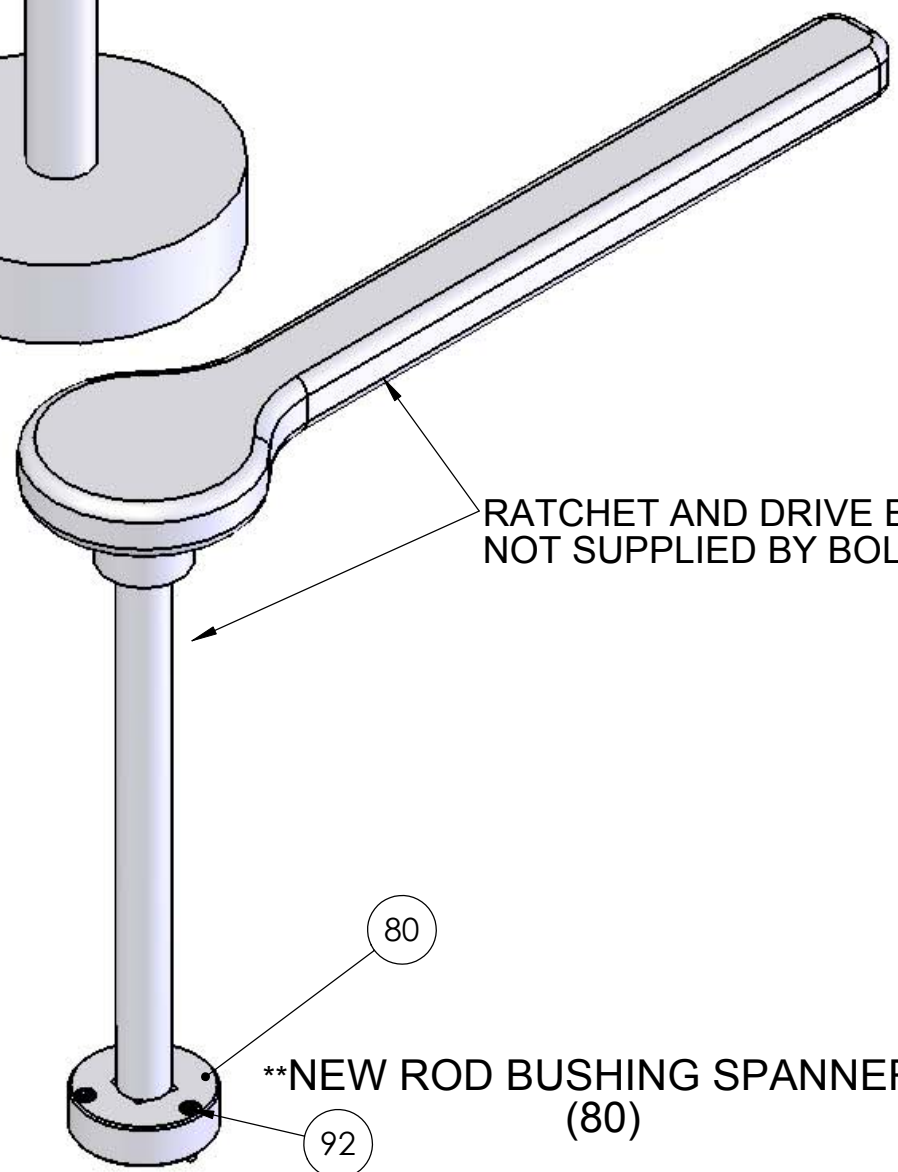

****NEW ROD BUSHING SPANNER WRENCH** (80)**

RATCHET AND DRIVE EXTENSION NOT SUPPLIED BY BOLTTECH-MANNINGS

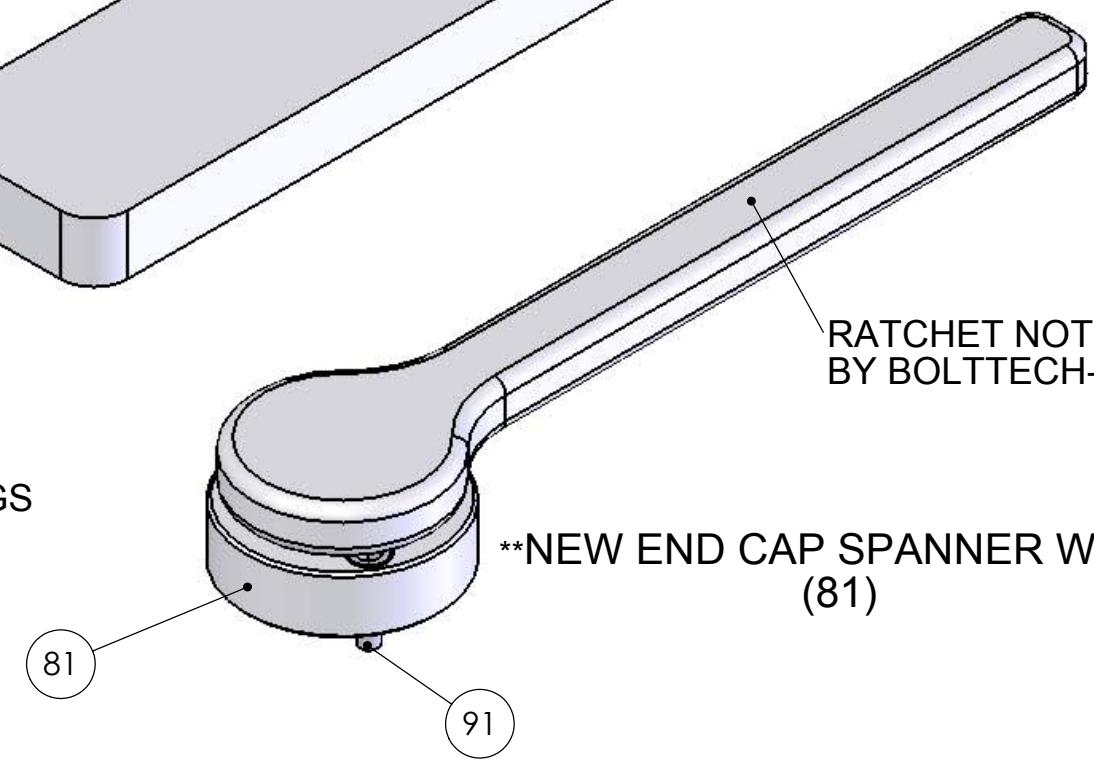

****NEW END CAP SPANNER WRENCH** (81)**


RATCHET NOT SUPPLIED BY BOLTTECH-MANNINGS

SOFTWARE: SOLID WORKS	DATE	NAME
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN	CHECKED
MATERIAL	ENG APPR.	MFG APPR.
HEAT TREAT	Q.A.	
FINISH	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.	

BOLTTECH We Own the Future of Bolting Technology		
CUSTOMER:		
TITLE:		
SIZE B	DWG. NO.	REV
SCALE: 1:2	WEIGHT:	SHEET 17 OF 18

ITEM #	PART NAME	PART #	QUANTITY
1	PISTON	QD403E	1
4	CYLINDER	QD401	1
6	ROD BUSHING	QD417	1
8	END CAP	QD402B	1
14	HOUSING	QD4SQDR11	1
17	HOUSING BUSHING	QD4SQDR08	2
18, 19	DRIVE PLATE (R/L)	QD4SQDR04	2
20	PAWL SPRING	6811210	1
21	PAWL	QD4SQDR03	1
22	RATCHET WHEEL	QD4SQDR02	1
23	DRIVE PLATE PIN SNAP RING	WS-53	2
24	DRIVE PLATE PIN	QD406E	1
27	TAPER BOLT	QD408	4
28	HOUSING COVER PLATE	QD4SNP	1
29	HOUSING COVER PLATE RIVET	68027408	4
31	REACTION BAR CLAMP	QD4RB01	1
40	SQUARE DRIVE	QD4SQDR05	1
41	BACKING PLATE	QD4SQDR06	1
42	THUMB WHEEL	QD4SQDR07	1
49	SEAL KIT	QD4_SEAL_KIT	1
53	SWIVEL POST	SW13-BLK	1
52A	O-RING	SW3-6	3
52B	O-RING	SW3-5	4
50	SWIVEL BODY	SW3X-1BLK	1
51	SWIVEL SIDES	SW3BLK-2A	2
52	SWIVEL POST SNAP RING	WS50	1
55	SNAP RING	WS-63	2
54	FEMALE QUICK CONNECT	SW-05	1
56	MALE QUICK CONNECT	SW-06	1
58	SWIVEL BODY CAP SCREWS	M4X10MMLHCS	6
59	SMALL O-RINGS	005-9250	2
57	1/4" X 1/4" NIPPLE	19-950-1622	1
60	REACTION BAR	QD4RB07	1
66	2 ND PAWL	QD411	1
67	2 ND PAWL AXLE	QD412	2
68	2 ND PAWL ROLL PIN	1/16X1/2 ROLL PIN	2
69	2 ND PAWL EXTENSION SPRING	E01200180380M	1
70	2 ND PAWL SET SCREW	6/32X3/16SS	2
80	ROD BUSHING WRENCH	QD4T01	1
81	CYLINDER END CAP WRENCH	QD4T02	1
85	CONNECTING ROD	QD4CR	1
86	ENGAGEMENT BOLT	10-24X3/8SHCS	1
87	BOSS BUSHING	QD4BB	1
90	PISTON CONE	QD4-T04	1
91	QD4 SPANNER SCREW	91251A537	3
92	QD4 BUSHING SCREW	94105A193	3

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

SOFTWARE: SOLID WORKS	DATE	NAME	 <p>We Own the Future of Bolting Technology</p>	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL +/- 1/32" ANGULAR: +/- 1/2 DEGREE TWO PLACE DECIMAL +/- 0.01 THREE PLACE DECIMAL +/- 0.005	DRAWN			CUSTOMER:
MATERIAL	CHECKED			TITLE:
HEAT TREAT	ENG APPR.			SIZE B DWG. NO. REV
FINISH	MFG APPR.		SCALE: 1:4 WEIGHT: SHEET 18 OF 18	
	Q.A.			

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BOLTTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BOLTTECH IS PROHIBITED.